

PLC3-254A

OWNER/DEVELOPER
PINES AT THE RESERVE, LLC
1420 WEST KENOSHA
BROKEN ARROW, OK 74012
PHONE: 918-688-5660
ATTN: CHUCK RAMSAY


FINAL PLAT

Reserve at Pines III

A SUBDIVISION OF PART OF THE NORTHEAST QUARTER (NE/4) OF SECTION THIRTY-ONE (31), TOWNSHIP NINETEEN (19) NORTH, RANGE FIFTEEN (15) EAST, CITY OF BROKEN ARROW, WAGONER COUNTY, STATE OF OKLAHOMA R-3(BAZ-2041)

ENGINEER/SURVEYOR

AAB ENGINEERING LLC
CERTIFICATE OF AUTHORIZATION NO. 6318, EXP. JUNE, 30, 2026
PO BOX 2136
SAND SPRINGS, OK 74063
PHONE: 918.514.4283
FAX: 918.514.4288
EMAIL: ALAN @ AABENG.COM

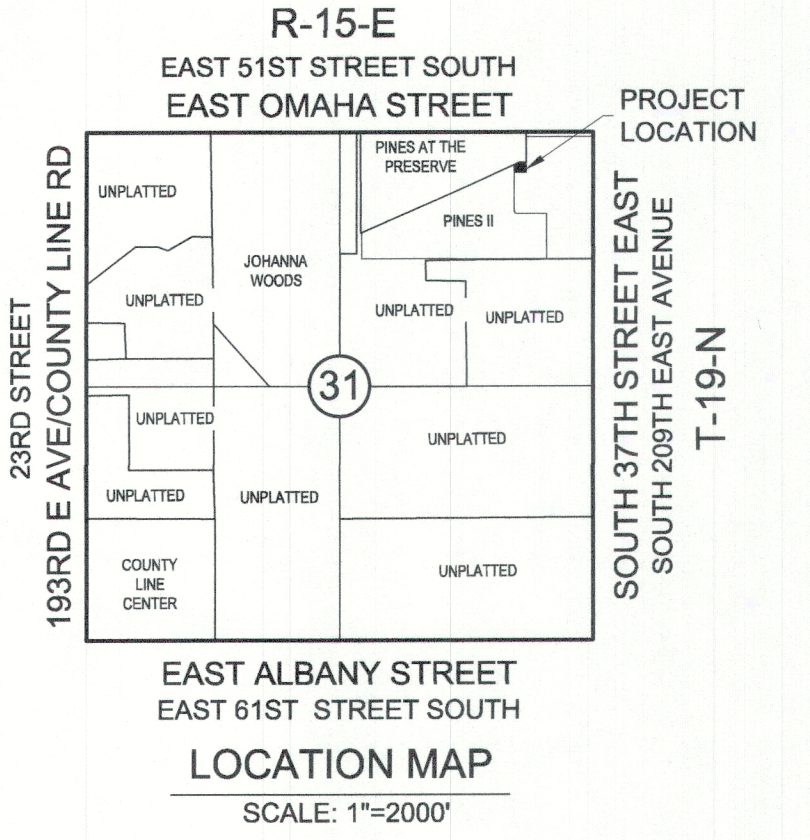

NW CORNER
NE/4 SECTION 31
T-19-N, R-15-E
FOUND 3/8" IRON PIN
POINT OF COMMENCEMENT

NE CORNER
NE/4 SECTION 31
T-19-N, R-15-E
RR SPIKE FOUND

LEGEND

B/L.....BUILDING LINE
LNA.....LIMITS OF NO ACCESS
POB.....POINT OF BEGINNING
POC.....POINT OF COMMENCEMENT
ROW.....RIGHT OF WAY
U/E.....UTILITY EASEMENT
F/L/E.....FENCE AND LANDSCAPE EASEMENT
B/U.....BUILDING LINE AND UTILITY EASEMENT
S/E.....SIDEWALK EASEMENT
BK.....BOOK
PG.....PAGE
R.A.....RESTRICTED ACCESS
XXX.....ADDRESS
IPS.....IRON PIN SET
PKS.....PK NAIL SET

CONTACTS

MUNICIPAL AUTHORITY
CITY OF BROKEN ARROW
210 SOUTH 1ST STREET
BROKEN ARROW, OK 74012

UTILITY CONTACTS

OKLAHOMA NATURAL
GAS COMPANY
5848 EAST 15TH STREET
BROKEN ARROW, OK 74112
PHONE: 918.831.8293

WINDSTREAM TELECOM COMPANY
2300 EAST 1ST PLACE
BROKEN ARROW, OK 74012
PHONE: 918.451.3427


AEP / PSO
212 EAST 6TH STREET
BROKEN ARROW, OK 74119
PHONE: 918.599.2351

COX COMMUNICATIONS
11811 EAST 51ST STREET
BROKEN ARROW, OK 74145
PHONE: 918.286.4658

WAGONER COUNTY RURAL WATER
DISTRICT #4
9816 S. 239TH EAST AVENUE
BROKEN ARROW, OKLAHOMA 74014
PHONE: 918-258-2331

FLOODPLAIN

PROPERTY IS NOT LOCATED WITHIN A FEDERALLY
DEFINED SPECIAL FLOOD HAZARD AREA PER FIRM
PANEL "40145C0105J" DATED SEPTEMBER 30, 2016.

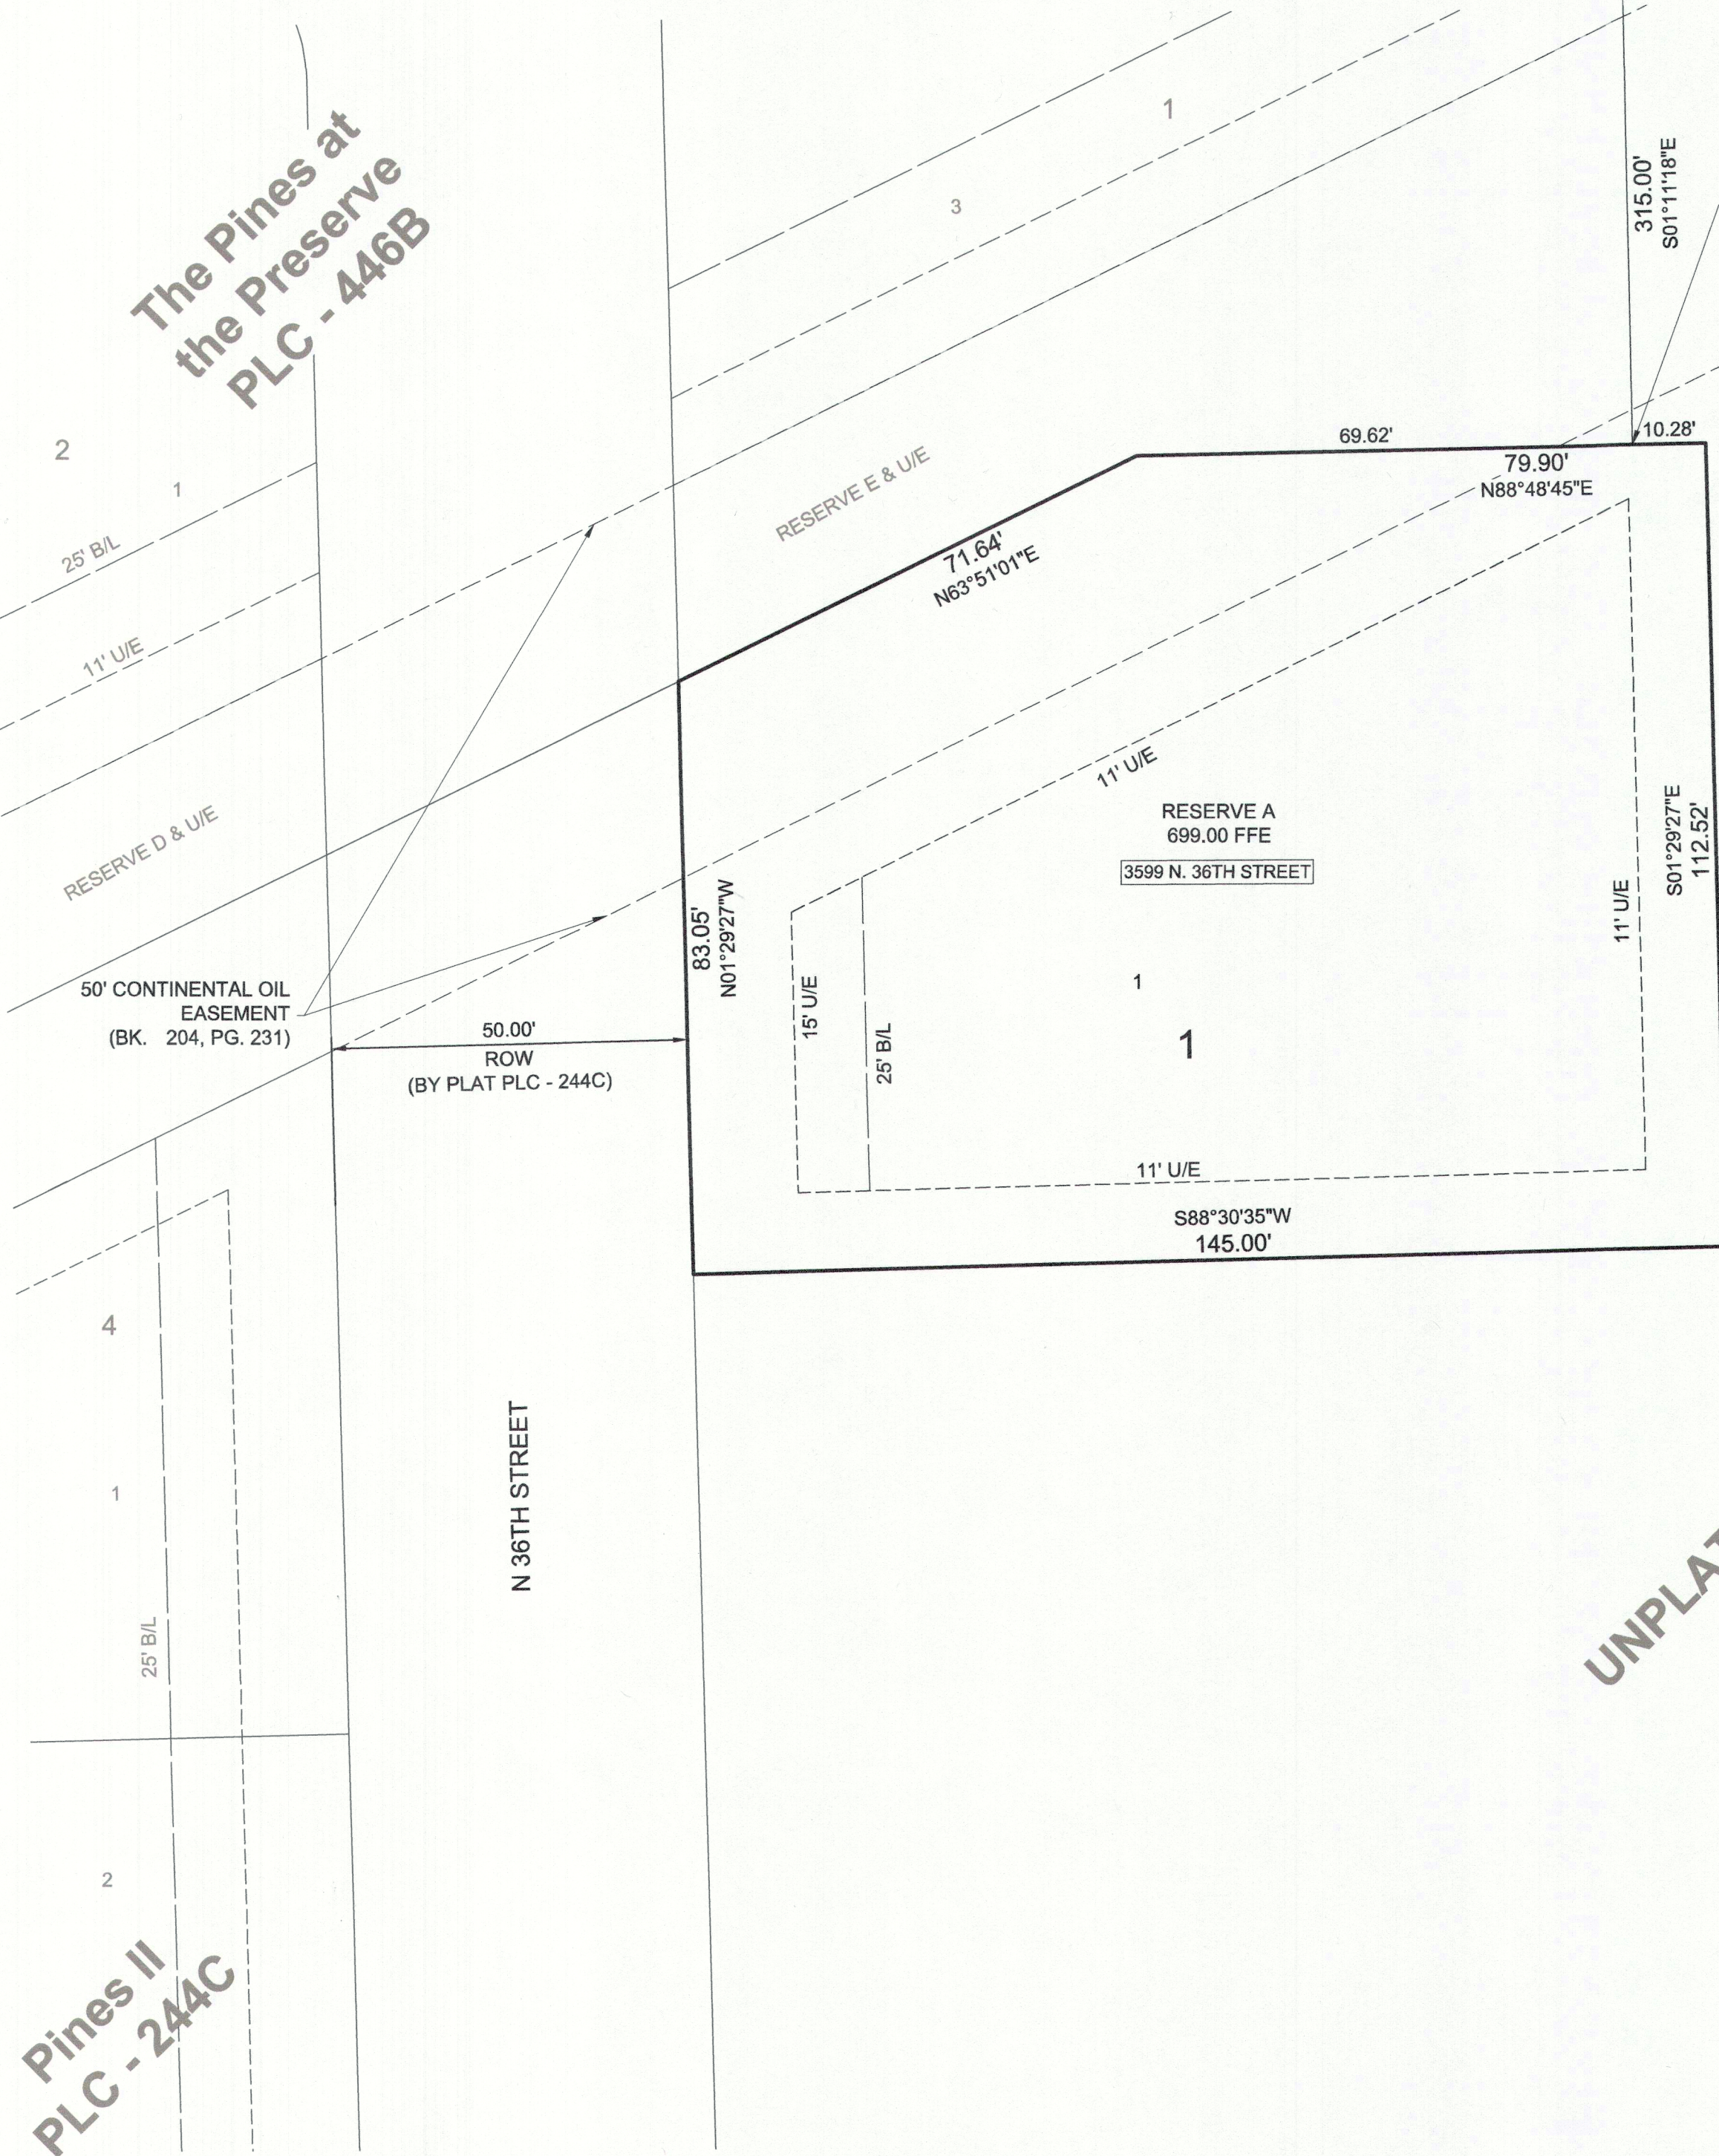

SUBDIVISION STATISTICS

SUBDIVISION CONTAINS ONE (1) RESERVE
CONTAINING 0.35 ACRES

RESERVE A.....0.35 ACRES

SITE DATA

BENCHMARK
5/8" REBAR-1 1/2" ALUMINUM CAP-FLUSH-SET IN
CONCRETE-STAMPED "90", SET N.E. OF THE INTERSECTION OF
193RD E AVE. AND 51ST ST.
ELEV.= 686.25' (NAVD '88)

BASIS OF BEARINGS
GRID BEARINGS OF THE STATE PLANE COORDINATE SYSTEM -
ZONE 3501 NORTH WITH N 88°48'45" E BEING THE NORTH LINE
OF THE NORTHEAST QUARTER OF SECTION 31 T-19N R-15-E.

LAND AREA
15,387 SF± / 0.35 ACRES±

MONUMENTATION
A 3/8"X 18" REBAR WITH A YELLOW PLASTIC CAP STAMPED
"6318" TO BE SET AT ALL LOT CORNERS, ALL STREET
CENTERLINE INTERSECTIONS, POINTS OF CURVE, POINTS OF
TANGENT, POINTS OF COMPOUND CURVE, POINTS OF
REVERSE CURVE, CENTER OF CUL-DE-SACS AND CENTER OF
EYEBROWS, AFTER COMPLETION OF IMPROVEMENTS,
UNLESS NOTED OTHERWISE.

ADDRESSES
ADDRESSES SHOWN ON THIS PLAT WERE ACCURATE AT THE
TIME THIS PLAT WAS FILED. ADDRESSES ARE SUBJECT TO
CHANGE AND SHOULD NEVER BE RELIED ON IN PLACE OF
LEGAL DESCRIPTION.

NO DOCUMENTED WELLS ON SITE PER OIL AND GAS
CONSERVATION DIVISION CERTIFICATE OF RECORDS SEARCH
RECIEPT #2186683

DETENTION DETERMINATION
DETENTION DETERMINATION NUMBER: DD-091124-55

APPROVED BY THE CITY COUNCIL OF THE
CITY OF BROKEN ARROW, OKLAHOMA ON
01-22-2025
MAYOR
ATTEST: CITY CLERK





PLC3-254A

FINAL PLAT

OWNER/DEVELOPER

PINES AT THE RESERVE, LLC

1420 WEST KENOSHIA
BROKEN ARROW, OK 74012
PHONE: 918-688-5660
ATTN: CHUCK RAMSAY

Reserve at Pines III

A SUBDIVISION OF PART OF THE NORTHEAST QUARTER (NE/4) OF SECTION
THIRTY-ONE (31), TOWNSHIP NINETEEN (19) NORTH, RANGE FIFTEEN (15) EAST,
CITY OF BROKEN ARROW, WAGONER COUNTY, STATE OF OKLAHOMA

ENGINEER/SURVEYOR

AAB ENGINEERING LLC

CERTIFICATE OF AUTHORIZATION NO. 6318, EXP. JUNE, 30, 2026
PO BOX 2136
SAND SPRINGS, OK 74063
PHONE: 918.514.4283
FAX: 918.514.4288
EMAIL: ALAN @ AABENG.COM

KNOW ALL MEN BY THESE PRESENTS:

THE PINES AT THE PRESERVE, LLC, AN OKLAHOMA LIMITED LIABILITY COMPANY, HEREINAFTER REFERRED TO AS THE "OWNER/DEVELOPER", IS THE OWNER OF THE FOLLOWING DESCRIBED LAND IN THE CITY OF BROKEN ARROW, WAGONER COUNTY, STATE OF OKLAHOMA, TO-WIT:

A TRACT OF LAND BEING PART OF THE NORTHEAST QUARTER (NE/4) OF SECTION 31, TOWNSHIP NINETEEN (19) NORTH, RANGE FIFTEEN (15) EAST OF THE INDIAN BASE AND MERIDIAN, WAGONER COUNTY, STATE OF OKLAHOMA ACCORDING TO THE U.S. GOVERNMENT SURVEY THEREOF, BEING MORE PARTICULARLY DESCRIBED AS FOLLOWS:

COMMENCING AT THE NORTHWEST CORNER OF SAID NORTHEAST QUARTER (NE/4) OF SECTION 31, THENCE NORTH 88°48'45" EAST ALONG THE NORTH LINE OF SAID NORTHEAST QUARTER (NE/4) OF SECTION 31, A DISTANCE OF 1904.90 FEET TO THE NORTHEAST CORNER OF THE PINES AT THE PRESERVE; THENCE SOUTH 01°11'18" EAST ALONG THE EAST LINE THEREOF A DISTANCE OF 315.00 FEET TO THE POINT OF BEGINNING;

THENCE NORTH 88°48'45" EAST, A DISTANCE OF 10.28 FEET; THENCE SOUTH 01°29'27" EAST, A DISTANCE OF 112.52 FEET; THENCE SOUTH 88°30'35" WEST, A DISTANCE OF 145.00 FEET TO THE EAST LINE OF PINES II & EAST RIGHT-OF-WAY LINE OF NORTH 36TH STREET; THENCE NORTH 01°29'27" WEST ALONG SAID EAST LINE A DISTANCE OF 83.05 FEET TO THE SOUTH LINE OF THE PINES AT THE PRESERVE; THENCE NORTH 63°51'01" EAST ALONG SAID SOUTH LINE OF THE PINES AT THE PRESERVE, A DISTANCE OF 71.64 FEET; THENCE NORTH 88°48'45" EAST CONTINUING ALONG SAID SOUTH LINE A DISTANCE OF 69.62 FEET TO THE POINT OF BEGINNING.

SAID TRACT CONTAINS 15,387 SQUARE FEET OR 0.35 ACRES, MORE OR LESS.

AND HAS CAUSED THE ABOVE DESCRIBED TRACT OF LAND TO BE SURVEYED, STAKED, PLATTED AND SUBDIVIDED INTO 1 LOT IN 1 BLOCK REFERRED TO HEREIN AS A RESERVE, IN CONFORMITY WITH THE ACCOMPANYING PLAT, AND HAS DESIGNATED THE SUBDIVISION AS "RESERVE AT PINES III", A SUBDIVISION OF THE CITY OF BROKEN ARROW, WAGONER COUNTY, OKLAHOMA (HEREINAFTER REFERRED TO AS "RESERVE" OR THE "SUBDIVISION").

SECTION I. PUBLIC STREETS, EASEMENTS AND UTILITIES

A. PUBLIC STREETS AND GENERAL UTILITY EASEMENTS

THE OWNER/DEVELOPER DOES HEREBY DEDICATE FOR PUBLIC USE THE STREETS DEPICTED ON THE ACCOMPANYING PLAT AND DOES FURTHER DEDICATE FOR PUBLIC USE THE UTILITY EASEMENTS AS DEPICTED ON THE ACCOMPANYING PLAT AS "UIET" OR "UTILITY EASEMENT", FOR OWNER/DEVELOPER AND ALL UTILITY SERVICES WITH FRANCHISE RIGHTS WITHIN THE CITY OF BROKEN ARROW FOR THE SEVERAL PURPOSES OF CONSTRUCTING, MAINTAINING, OPERATING, REPAIRING, REPLACING, AND/OR REMOVING ANY AND ALL PUBLIC UTILITIES, INCLUDING STORM SEWERS, SANITARY SEWERS, TELEPHONE AND COMMUNICATION LINES, ELECTRIC POWER LINES AND TRANSFORMERS, GAS LINES, WATER LINES AND CABLE TELEVISION LINES, TOGETHER WITH ALL FITTINGS, INCLUDING THE POLES, WIRES, CONDUITS, PIPES, VALVES, METERS AND EQUIPMENT FOR EACH OF SUCH FACILITIES AND ANY OTHER APPURTENANCES THERETO, WITH THE RIGHTS OF INGRESS AND EGRESS TO AND UPON THE UTILITY EASEMENTS FOR THE USES AND PURPOSES AFORESAID, PROVIDED HOWEVER, THE OWNER/DEVELOPER HEREBY RESERVES THE RIGHT TO CONSTRUCT, MAINTAIN, OPERATE, LAY AND RE-LAY ALL UTILITY LINES, INCLUDING WATER LINES AND SEWER LINES, EXCLUDING GAS LINES AND GAS SERVICE LINES, TOGETHER WITH THE RIGHT OF INGRESS AND EGRESS FOR SUCH CONSTRUCTION, MAINTENANCE, OPERATION, LAYING AND RE-LAYING OVER, ACROSS AND ALONG ALL OF THE UTILITY EASEMENTS DEPICTED ON THE PLAT, FOR THE PURPOSE OF FURNISHING WATER SERVICE, SEWER SERVICE AND ALL UTILITY SERVICES, EXCLUDING NATURAL GAS, TO THE AREA INCLUDED IN THE PLAT AND ELSEWHERE, AS MAY BE REQUIRED. THE OWNER/DEVELOPER HEREIN IMPOSES A RESTRICTIVE COVENANT, WHICH COVENANT SHALL BE BINDING ON EACH LOT OWNER AND SHALL BE ENFORCEABLE BY THE CITY OF BROKEN ARROW, OKLAHOMA, AND BY THE SUPPLIER OF ANY AFFECTED UTILITY SERVICE, THAT WITHIN THE UTILITY EASEMENTS DEPICTED ON THE ACCOMPANYING PLAT NO BUILDING, STRUCTURE OR OTHER ABOVE OR BELOW GROUND OBSTRUCTION SHALL BE PLACED, ERECTED, INSTALLED OR MAINTAINED, PROVIDED HOWEVER, NOTHING HEREIN SHALL BE DEEMED TO PROHIBIT DRIVES, PARKING AREAS, CURBING, LANDSCAPING, CUSTOMARY SCREENING FENCES AND WALLS THAT DO NOT CONSTITUTE AN OBSTRUCTION.

B. UTILITY LINES AND SERVICE

- OVERHEAD LINES FOR THE SUPPLY OF ELECTRIC, TELEPHONE AND CABLE TELEVISION SERVICES AND OTHER COMMUNICATION SERVICES MAY BE LOCATED ALONG THE PERIMETER EASEMENTS OF THE SUBDIVISION. STREET LIGHT POLES OR STANDARDS MAY BE SERVED BY OVERHEAD LINE OR UNDERGROUND CABLE THROUGHOUT THE SUBDIVISION. OTHERWISE, ALL SUPPLY LINES SHALL BE LOCATED UNDERGROUND IN THE GENERAL UTILITY EASEMENTS AND IN THE RIGHTS-OF-WAY FOR PUBLIC STREETS AS DEPICTED BY THE PLAT. SERVICE PEDESTALS AND TRANSFORMERS, AS SOURCES OF SUPPLY AT SECONDARY VOLTAGES, MAY ALSO BE LOCATED IN THE GENERAL UTILITY EASEMENTS.
- UNDERGROUND SERVICE CABLES TO ALL STRUCTURES WHICH MAY BE LOCATED WITHIN THE SUBDIVISION MAY BE RUN FROM THE NEAREST SERVICE PEDESTAL OR TRANSFORMER TO THE POINT OF USAGE DETERMINED BY THE LOCATION AND CONSTRUCTION OF SUCH STRUCTURE AS MAY BE LOCATED UPON THE LOT, PROVIDED THAT UPON THE INSTALLATION OF A SERVICE CABLE TO A PARTICULAR STRUCTURE, THE SUPPLIER OF SERVICE SHALL THEREAFTER BE DEEMED TO HAVE A DEFINITIVE, PERMANENT AND EFFECTIVE EASEMENT ON THE LOT, COVERING A 5 FOOT STRIP EXTENDING 2.5 FEET ON EACH SIDE OF THE SERVICE CABLE, EXTENDING FROM THE SERVICE PEDESTAL OR TRANSFORMER TO THE SERVICE ENTRANCE ON THE STRUCTURE.
- THE SUPPLIER OF ELECTRIC, TELEPHONE AND CABLE TELEVISION SERVICES AND OTHER COMMUNICATION SERVICES, THROUGH ITS AGENTS AND EMPLOYEES, SHALL AT ALL TIMES HAVE RIGHT OF ACCESS TO ALL GENERAL UTILITY EASEMENTS DEPICTED ON THE ACCOMPANYING PLAT OR OTHERWISE PROVIDED FOR IN THIS DEED OF DEDICATION FOR THE PURPOSE OF INSTALLING, MAINTAINING, REMOVING OR REPLACING ANY PORTION OF THE UNDERGROUND ELECTRIC, TELEPHONE, CABLE TELEVISION OR COMMUNICATION FACILITIES INSTALLED BY THE SUPPLIER OF THE UTILITY SERVICE.
- THE OWNER OF THE LOT SHALL BE RESPONSIBLE FOR THE PROTECTION OF THE UNDERGROUND SERVICE FACILITIES LOCATED ON HIS LOT AND SHALL PREVENT THE ALTERATION OF GRADE OR ANY CONSTRUCTION ACTIVITY THAT WOULD INTERFERE WITH THE ELECTRIC, TELEPHONE, CABLE TELEVISION OR COMMUNICATION FACILITIES. THE SUPPLIER OF SERVICE SHALL BE RESPONSIBLE FOR ORDINARY MAINTENANCE OF UNDERGROUND FACILITIES, BUT THE OWNER SHALL PAY FOR DAMAGE OR RELOCATION OF SUCH FACILITIES CAUSED OR NECESSITATED BY ACTS OF THE OWNER OR HIS AGENTS OR CONTRACTORS.
- THE FOREGOING COVENANTS SET FORTH IN THIS PARAGRAPH B SHALL BE ENFORCEABLE BY THE SUPPLIER OF THE ELECTRIC, TELEPHONE, CABLE TELEVISION OR OTHER COMMUNICATION SERVICE AND THE OWNER OF THE LOT AGREES TO BE BOUND HEREBY.

C. WATER, SANITARY SEWER AND STORM SEWER SERVICE

- THE OWNER OF THE LOT SHALL BE RESPONSIBLE FOR THE PROTECTION OF THE PUBLIC WATER MAINS, SANITARY SEWER MAINS AND STORM SEWERS LOCATED ON THEIR LOT AND SHALL PREVENT THE ALTERATION OF GRADE OR ANY CONSTRUCTION ACTIVITY WHICH MAY INTERFERE WITH SAID PUBLIC WATER MAIN, PUBLIC SANITARY SEWER MAIN OR STORM SEWER.
- WITHIN THE UTILITY AND DRAINAGE EASEMENT AREAS DEPICTED ON THE ACCOMPANYING PLAT, THE ALTERATION OF GRADE FROM THE CONTOURS EXISTING UPON THE COMPLETION OF THE INSTALLATION OF A PUBLIC WATER MAIN, SANITARY SEWER MAIN, STORM SEWER OR DRAINAGE WAYS, OR ANY CONSTRUCTION ACTIVITY WHICH WOULD INTERFERE WITH PUBLIC WATER MAINS, SANITARY SEWER MAINS AND STORM SEWERS SHALL BE PROHIBITED. THE CITY OF BROKEN ARROW, INTER ALIA, MAY SPECIFICALLY ENFORCE THIS PROVISION.
- WAGONER COUNTY RURAL WATER DISTRICT #4, OR ITS SUCCESSORS AS THE PROVIDER, SHALL BE RESPONSIBLE FOR ORDINARY MAINTENANCE OF PUBLIC WATER MAINS, BUT THE OWNER SHALL PAY FOR DAMAGE OR RELOCATION OF SUCH FACILITIES CAUSED OR NECESSITATED BY ACTS OF THE OWNER, HIS AGENTS OR CONTRACTORS.

- THE CITY OF BROKEN ARROW, OKLAHOMA, OR ITS SUCCESSORS, SHALL AT ALL TIMES HAVE RIGHT OF ACCESS TO ALL EASEMENTS DEPICTED ON THE ACCOMPANYING PLAT, OR OTHERWISE PROVIDED FOR IN THIS DEED OF DEDICATION, FOR THE PURPOSE OF INSTALLING, MAINTAINING, REMOVING OR REPLACING ANY PORTION OF UNDERGROUND WATER OR SEWER FACILITIES OR STORM WATER FACILITIES. WAGONER COUNTY RURAL WATER DISTRICT #4 SHALL HAVE SUCH RIGHT OF ACCESS FOR THE PURPOSE OF INSTALLING, MAINTAINING, REMOVING OR REPLACING ANY PORTION OF POTABLE WATER FACILITIES. ITS SUCCESSOR UTILITY OR MUNICIPALITY PROVIDING WATER SERVICE SHALL HAVE SIMILAR RIGHT OF ACCESS.
- WHERE WATER LINES ARE INSTALLED WITHIN A UTILITY EASEMENT, THAT PORTION OF THE UTILITY EASEMENT IS FOR THE USE OF WAGONER COUNTY RURAL WATER DISTRICT #4, OKLAHOMA, OR ITS SUCCESSORS. THE UTILITY EASEMENTS DEDICATED HEREIN FOR THE PURPOSE OF PROVIDING POTABLE WATER ARE DEDICATED TO WAGONER COUNTY RURAL WATER DISTRICT #4, OR ITS SUCCESSORS OR ASSIGNS, AS THE EXCLUSIVE PROVIDER OF POTABLE WATER TO THE SUBDIVISION. SEWER, GAS, ELECTRIC, COMMUNICATION, CABLE, SOLID WASTE MANAGEMENT, AND OTHER PROVIDERS OF UTILITIES, OTHER THAN POTABLE WATER, MAY ALSO USE SAID EASEMENTS.
- THE FOREGOING COVENANTS SET FORTH IN THIS PARAGRAPH C SHALL BE ENFORCEABLE BY THE CITY OF BROKEN ARROW, OKLAHOMA, WAGONER COUNTY RURAL WATER DISTRICT #4, THEIR SUCCESSORS, OR ANY UTILITY PROVIDER OF SERVICES AND THE OWNER OF THE LOT AGREES TO BE BOUND HEREBY.
- PAVING AND LANDSCAPING WITHIN EASEMENTS**
THE OWNER OF THE LOT AFFECTED SHALL BE RESPONSIBLE FOR THE REPAIR OF DAMAGE TO LANDSCAPING AND PAVING OCCASIONED BY NECESSARY INSTALLATION OR MAINTENANCE OF UNDERGROUND WATER, SEWER, STORM SEWER, NATURAL GAS, COMMUNICATION, CABLE TELEVISION OR ELECTRIC FACILITIES WITHIN THE EASEMENT AREAS DEPICTED UPON THE ACCOMPANYING PLAT, PROVIDED, HOWEVER, THE CITY OF BROKEN ARROW, OKLAHOMA, OR THE SUPPLIER OF THE UTILITY SERVICE SHALL USE REASONABLE CARE IN THE PERFORMANCE OF SUCH ACTIVITIES.

E. GAS SERVICE

- THE OWNER OF THE LOT SHALL BE RESPONSIBLE FOR THE PROTECTION OF THE UNDERGROUND GAS FACILITIES LOCATED ON THE LOT.
- WITHIN THE DEPICTED UTILITY EASEMENT AREAS, THE ALTERATION OF GRADE OR ANY CONSTRUCTION ACTIVITY, WHICH MAY INTERFERE WITH THE UNDERGROUND GAS FACILITIES, SHALL BE PROHIBITED.
- THE SUPPLIER OF GAS SERVICE OR ITS SUCCESSORS SHALL BE RESPONSIBLE FOR ORDINARY MAINTENANCE OF THE GAS FACILITIES, BUT THE OWNER SHALL PAY FOR DAMAGE OR RELOCATION OF SUCH FACILITIES CAUSED OR NECESSITATED BY ACTS OF THE OWNER, HIS AGENTS OR CONTRACTORS.
- THE SUPPLIER OF GAS SERVICE OR ITS SUCCESSORS SHALL AT ALL TIMES HAVE RIGHT OF ACCESS WITH THEIR EQUIPMENT TO ALL EASEMENT WAYS DEPICTED ON THE PLAT OR OTHERWISE PROVIDED FOR IN THIS DEED OF DEDICATION FOR THE PURPOSE OF INSTALLING, MAINTAINING, REMOVING OR REPLACING ANY PORTION OF UNDERGROUND GAS FACILITIES.
- UNDERGROUND GAS SERVICE LINES TO ALL STRUCTURES WHICH MAY BE LOCATED WITHIN THE SUBDIVISION MAY BE RUN FROM THE NEAREST GAS MAIN TO THE POINT OF USAGE DETERMINED BY THE LOCATION AND CONSTRUCTION OF SUCH STRUCTURE AS MAY BE LOCATED UPON THE LOT, PROVIDED THAT UPON THE INSTALLATION OF A SERVICE LINE TO A PARTICULAR STRUCTURE, THE SUPPLIER OF SERVICE SHALL THEREAFTER BE DEEMED TO HAVE A DEFINITIVE, PERMANENT AND EFFECTIVE EASEMENT ON THE LOT, COVERING A 5 FOOT STRIP EXTENDING 2.5 FEET ON EACH SIDE OF THE SERVICE LINE, EXTENDING FROM THE GAS MAIN TO THE SERVICE ENTRANCE ON THE STRUCTURE.
- THE FOREGOING COVENANTS SET FORTH IN THIS SUBSECTION E SHALL BE ENFORCEABLE BY THE SUPPLIER OF GAS SERVICE OR ITS SUCCESSORS AND THE OWNER OF THE LOT AGREES TO BE BOUND HEREBY.

F. RESERVE A

THE USE OF RESERVE A SHALL BE LIMITED TO OPEN SPACE, RECREATIONS, LANDSCAPING, POOLS, CLUBHOUSES AND UTILITIES. ANY TRAILS CONSTRUCTED WITHIN THE RESERVE MUST MEET ADA REQUIREMENTS AND SHALL BE MAINTAINED BY THE HOMEOWNERS ASSOCIATION. THE RESERVE AREA SHALL SUBSEQUENTLY BE CONVEYED TO THE HOMEOWNERS' ASSOCIATION TO BE FORMED PURSUANT TO SECTION III FOR THE PURPOSES OF THE ADMINISTRATION AND MAINTENANCE OF RESERVES AND OTHER COMMON AREAS OF THE SUBDIVISION.

G. SURFACE DRAINAGE AND LOT GRADING RESTRICTION

EACH LOT SHALL RECEIVE AND DRAIN, IN AN UNOBSTRUCTED MANNER, THE STORM AND SURFACE WATERS FROM LOTS AND DRAINAGE AREAS OF HIGHER ELEVATION AND FROM PUBLIC STREETS AND EASEMENTS. NO LOT OWNER SHALL CONSTRUCT OR PERMIT TO BE CONSTRUCTED ANY FENCING OR OTHER OBSTRUCTIONS WHICH WOULD IMPAIR THE DRAINAGE OF STORM AND SURFACE WATERS OVER AND ACROSS HIS LOT. NO DRAINAGE SHALL FROM A HIGHER LOT MAY CROSS MORE THAN FOUR (4) LOTS BEFORE BEING DIRECTED TO THE STREET. THE FOREGOING COVENANTS SET FORTH IN THIS PARAGRAPH F SHALL BE ENFORCEABLE BY ANY AFFECTED LOT OWNER, BY THE OWNER/DEVELOPER AND BY THE HOMEOWNERS ASSOCIATION.

H. SIDEWALKS

SIDEWALKS ARE REQUIRED ALONG STREETS DESIGNATED BY AND IN ACCORDANCE WITH SUBDIVISION REGULATIONS. THE OWNER SHALL CONSTRUCT REQUIRED SIDEWALKS WITHIN ANY RESERVE AREAS, COMMON AREAS AND ALONG ARTERIAL STREET FRONTAGES OF ABUTTING LOTS HAVING ACCESS ONTO MINOR STREETS. WHERE SIDEWALKS ARE NOT CONSTRUCTED BY THE OWNER/DEVELOPER, THE BUILDER OF A RESIDENCE ON EACH LOT SHALL CONSTRUCT THE REQUIRED SIDEWALK. REQUIRED SIDEWALKS SHALL BE CONSTRUCTED IN CONFORMANCE WITH CITY OF BROKEN ARROW ENGINEERING DESIGN STANDARDS.

I. MINIMUM BUILDING SETBACKS AND YARDS

- NO BUILDING SHALL BE LOCATED NEARER TO THE RIGHT OF WAY OF AN ADJOINING PUBLIC STREET THAN THE BUILDING LINE DEPICTED ON THE ACCOMPANYING PLAT.
- EACH LOT SHALL MAINTAIN SIDE YARDS WHICH IN THE AGGREGATE ARE NOT LESS THAN TEN (10) FEET IN WIDTH AND NO SIDE YARD SHALL BE LESS THAN FIVE (5) FEET IN WIDTH. SIDE YARDS ABUTTING A STREET SHALL NOT BE LESS THAN FIFTEEN (15) FEET, UNLESS THE GARAGE ENTRY IS LOCATED ON SUCH SIDE, WHERE IT WILL BE NO LESS THAN TWENTY-FIVE (25) FEET.
- THE MINIMUM REAR YARD SHALL BE TWENTY (20) FEET. CUSTOMARY ACCESSORY STRUCTURES MAY BE LOCATED IN THE REQUIRED REAR YARD, BUT NO BUILDING SHALL BE ERECTED NEARER THAN FIVE (5) FEET TO ANY LOT LINE.
- NO BUILDING, WHETHER PRINCIPAL OR ACCESSORY, SHALL ENCRATCH UPON ANY UTILITY EASEMENT AS DEPICTED ON THE ACCOMPANYING PLAT.

SECTION III. HOMEOWNERS' ASSOCIATION

K. FORMATION OF HOMEOWNERS' ASSOCIATION

THE OWNER/DEVELOPER HAS FORMED AN ASSOCIATION OF THE OWNERS OF THE LOTS WITHIN THE RESERVE AT PINES III (HEREINAFTER AND HERETOFORE REFERRED TO AS THE "HOMEOWNERS' ASSOCIATION") TO BE ESTABLISHED IN ACCORDANCE WITH THE STATUTES OF THE STATE OF OKLAHOMA, FOR THE GENERAL PURPOSES OF MAINTAINING THE COMMON AREAS, INCLUDING BUT WITHOUT LIMITATION THE RESERVE AREAS AND PERIMETER FENCING, AND ENHANCING THE VALUE, DESIRABILITY AND ATTRACTIVENESS OF ALL PHASES OF THE PINES.

L. MEMBERSHIP

EVERY PERSON OR ENTITY WHO IS A RECORD OWNER OF THE FEE INTEREST OF A LOT SHALL BE A MEMBER OF THE HOMEOWNERS' ASSOCIATION. MEMBERSHIP SHALL BE APPURTENANT TO AND MAY NOT BE SEPARATED FROM THE OWNERSHIP OF A LOT.

M. ASSESSMENT

EACH RECORD OWNER OF A LOT SHALL BE SUBJECT TO ASSESSMENT BY THE HOMEOWNERS' ASSOCIATION FOR THE PURPOSES OF IMPROVEMENT AND MAINTENANCE OF THE STORM WATER DETENTION FACILITIES, RESERVE AREAS AND OTHER COMMON AREAS.

SECTION IV. ENFORCEMENT, DURATION, AMENDMENT AND SEVERABILITY

A. ENFORCEMENT

THE RESTRICTIONS HEREIN SET FORTH ARE COVENANTS TO RUN WITH THE LAND AND SHALL BE BINDING UPON THE OWNER/DEVELOPER, ITS SUCCESSORS AND ASSIGNS. WITHIN THE PROVISIONS OF SECTION I. PUBLIC STREETS, EASEMENTS AND UTILITIES ARE SET FORTH CERTAIN COVENANTS AND THE ENFORCEMENT RIGHTS PERTAINING THERETO, AND ADDITIONALLY THE COVENANTS WITHIN SECTION I. WHETHER OR NOT SPECIFICALLY THEREIN SO STATED SHALL INURE TO THE BENEFIT OF AND SHALL BE ENFORCEABLE BY THE CITY OF BROKEN ARROW, OKLAHOMA. THE COVENANTS CONTAINED IN SECTION II, PRIVATE RESTRICTIONS, AND SECTION III, HOMEOWNERS' ASSOCIATION, SHALL INURE TO THE BENEFIT OF ANY OWNER OF A LOT AND THE HOMEOWNERS' ASSOCIATION. IF THE OWNER OF ANY LOT SHALL VIOLATE ANY OF THE COVENANTS WITHIN SECTION III, IT SHALL BE LAWFUL FOR ANY OWNER OF A LOT OR THE HOMEOWNERS' ASSOCIATION TO MAINTAIN ANY ACTION AT LAW OR IN EQUITY AGAINST THE PERSON OR PERSONS VIOLATING OR ATTEMPTING TO VIOLATE ANY SUCH COVENANT, TO PREVENT HIM OR THEM FROM SO DOING OR TO COMPEL COMPLIANCE WITH THE COVENANT. IN ANY JUDICIAL ACTION BROUGHT TO ENFORCE THE COVENANTS ESTABLISHED WITHIN THIS DEED OF DEDICATION, THE DEFENSE THAT THE PARTY INITIATING THE EQUITABLE PROCEEDING HAS AN ADEQUATE REMEDY AT LAW IS HEREBY WAIVED. IN ANY JUDICIAL ACTION BROUGHT BY ANY OWNER OF A LOT OR THE ASSOCIATION, WHICH ACTION SEEKS TO ENFORCE THE COVENANTS CONTAINED IN THE RESTRICTIVE COVENANTS HEREIN AND/OR TO RECOVER DAMAGES FOR THE BREACH THEREOF, THE PREVAILING PARTY SHALL BE ENTITLED TO RECEIVE REASONABLE ATTORNEY FEES AND COSTS AND EXPENSES INCURRED IN SUCH ACTION.

B. DURATION

THE RESTRICTIVE COVENANTS HEREIN, TO THE EXTENT PERMITTED BY APPLICABLE LAW, SHALL BE PERPETUAL BUT IN ANY EVENT SHALL BE IN FORCE AND EFFECT FOR A TERM OF NOT LESS THAN THIRTY (30) YEARS FROM THE DATE OF THE RECORDING OF THIS DEED OF DEDICATION UNLESS TERMINATED OR AMENDED AS HEREINAFTER PROVIDED.

C. AMENDMENT

THE COVENANTS CONTAINED WITHIN SECTION I, PUBLIC STREETS, EASEMENTS AND UTILITIES, MAY BE AMENDED OR TERMINATED AT ANY TIME BY A WRITTEN INSTRUMENT SIGNED AND ACKNOWLEDGED BY THE OWNER OF THE LAND TO WHICH THE AMENDMENT OR TERMINATION IS TO BE APPLICABLE AND APPROVED BY THE CITY OF BROKEN ARROW PLANNING COMMISSION, OR ITS SUCCESSORS AND THE CITY OF BROKEN ARROW, OKLAHOMA. THE COVENANTS AND RESTRICTIONS CONTAINED WITHIN SECTION II, PRIVATE RESTRICTIONS, MAY BE AMENDED OR TERMINATED AT ANY TIME BY A WRITTEN INSTRUMENT SIGNED AND ACKNOWLEDGED BY THE OWNER/DEVELOPER DURING SUCH PERIOD THAT THE OWNER/DEVELOPER IS THE OWNER OF AT LEAST 1 LOT, OR ALTERNATIVELY THE COVENANTS AND RESTRICTIONS MAY BE AMENDED OR TERMINATED AT ANY TIME BY A WRITTEN INSTRUMENT SIGNED AND ACKNOWLEDGED BY THE OWNERS OF 60% OF THE LOTS WITHIN THE SUBDIVISION. IN THE EVENT OF ANY CONFLICT BETWEEN AN AMENDMENT OR TERMINATION PROPERLY EXECUTED BY THE OWNER/DEVELOPER DURING ITS OWNERSHIP OF AT LEAST 1 LOT) AND ANY AMENDMENT OR TERMINATION PROPERLY EXECUTED BY THE OWNERS OF AT LEAST 60% OF THE LOTS, THE INSTRUMENT EXECUTED BY THE OWNER/DEVELOPER SHALL PREVAIL DURING ITS OWNERSHIP OF AT LEAST 1 LOT. THE PROVISIONS CONTAINED WITHIN SECTION III, HOMEOWNERS' ASSOCIATION, MAY BE AMENDED OR TERMINATED AT ANY TIME BY A WRITTEN INSTRUMENT SIGNED AND ACKNOWLEDGED BY THE OWNER/DEVELOPER DURING SUCH PERIOD THAT THE OWNER/DEVELOPER IS THE OWNER OF AT LEAST 1 LOT, OR ALTERNATIVELY THE COVENANTS AND RESTRICTIONS MAY BE AMENDED OR TERMINATED AT ANY TIME BY A MAJORITY VOTE OF THE MEMBERS OF THE HOMEOWNER ASSOCIATION AS EVIDENCED BY WRITTEN INSTRUMENT SIGNED AND ACKNOWLEDGED BY THE PRESIDENT OF THE HOMEOWNERS' ASSOCIATION. IN THE EVENT OF ANY CONFLICT BETWEEN AN AMENDMENT OR TERMINATION PROPERLY EXECUTED BY THE OWNER/DEVELOPER (DURING ITS OWNERSHIP OF AT LEAST 1 LOT) AND ANY AMENDMENT OR TERMINATION EVIDENCED BY AN INSTRUMENT PROPERLY EXECUTED BY THE PRESIDENT OF THE HOMEOWNERS' ASSOCIATION, THE INSTRUMENT EXECUTED BY THE OWNER/DEVELOPER SHALL PREVAIL DURING ITS OWNERSHIP OF AT LEAST 1 LOT. THE PROVISIONS OF ANY INSTRUMENT AMENDING OR TERMINATING COVENANTS AS ABOVE SET FORTH SHALL BE EFFECTIVE FROM AND AFTER THE DATE, IT IS PROPERLY RECORDED.

D. SEVERABILITY

INVALIDATION OF ANY RESTRICTION SET FORTH HEREIN, OR ANY PART THEREOF, BY AN ORDER, JUDGMENT, OR DECREE OF ANY COURT, OR OTHERWISE, SHALL NOT INVALIDATE OR AFFECT ANY OF THE OTHER RESTRICTIONS OR ANY PART THEREOF AS SET FORTH HEREIN, WHICH SHALL REMAIN IN FULL FORCE AND EFFECT.

IN WITNESS WHEREOF: PINES AT THE PRESERVE, LLC, AN OKLAHOMA LIMITED LIABILITY COMPANY, HAS EXECUTED THIS INSTRUMENT THIS 6th DAY OF January, 2025.

PINES AT THE PRESERVE, LLC
AN OKLAHOMA LIMITED LIABILITY COMPANY

BY:
CHUCK RAMSAY, MANAGER

STATE OF OKLAHOMA)
) SS
COUNTY OF WAGONER)

THIS INSTRUMENT WAS ACKNOWLEDGED BEFORE ME ON THIS 6th DAY OF January, 2025, BY CHUCK RAMSAY, MANAGER OF PINES AT THE PRESERVE, LLC.

JAMIE BETCHAN

NOTARY PUBLIC
MY COMMISSION EXPIRES: 10/30/27
COMMISSION NUMBER: 23014411

JAMIE BETCHAN
NOTARY PUBLIC - STATE OF OKLAHOMA
MY COMMISSION EXPIRES OCTOBER 30, 2027
COMMISSION #23014411

WAGONER COUNTY TREASURER'S CERTIFICATE

I,
Christy Bieby J. Hays, COUNTY TREASURER OF WAGONER COUNTY, OKLAHOMA, HEREBY CERTIFY THAT I HAVE EXAMINED THE RECORDS PERTAINING TO AD VALOREM TAXES ON THE TRACT DESCRIBED IN THE ACCOMPANYING PLAT AND FIND THAT ALL THE AD VALOREM TAXES HAVE BEEN PAID AND INCLUDING 2024.

DATED THIS 10 DAY OF Feb, 2025.

Christy Bieby J. Hays
COUNTY TREASURER




CERTIFICATE OF SURVEY

I, JAY P. BISSELL, A LICENSED PROFESSIONAL LAND SURVEYOR IN THE STATE OF OKLAHOMA, HEREBY CERTIFY THAT I HAVE SURVEYED, SUBDIVIDED AND PLATTED THE ABOVE TRACT DESIGNATED AS "RESERVE AT THE PINES III" AN ADDITION TO THE CITY OF BROKEN ARROW, WAGONER COUNTY, STATE OF OKLAHOMA. THE ABOVE PLAT IS AN ACCURATE REPRESENTATION OF SAID SURVEY AND MEETS THE OKLAHOMA MINIMUM STANDARDS FOR THE PRACTICE OF LAND SURVEYING AS ADOPTED BY THE OKLAHOMA STATE BOARD OF LICENSURE FOR PROFESSIONAL ENGINEERS AND LAND SURVEYORS.

Jay P. Bissell 1-02-2025

JAY P. BISSELL
LICENSED PROFESSIONAL LAND SURVEYOR
OKLAHOMA NO. 1318



STATE OF OKLAHOMA)
) SS
COUNTY OF WAGONER)

BEFORE ME, A NOTARY PUBLIC IN AND FOR SAID STATE AND COUNTY, ON THIS 2ND DAY OF JANUARY 2025, PERSONALLY APPEARED JAY P. BISSELL, TO ME KNOWN TO BE THE IDENTICAL PERSON WHO SUBSCRIBED HIS NAME TO THE FOREGOING INSTRUMENT, AND ACKNOWLEDGED TO ME THAT HE EXECUTED THE SAME AS HIS FREE AND VOLUNTARY ACT AND DEED, FOR THE USES AND PURPOSE THEREIN SET FORTH.

ALAN ANDREW BETCHAN

NOTARY PUBLIC
MY COMMISSION EXPIRES: NOVEMBER 25, 2027
COMMISSION NUMBER: 111010522

ALAN ANDREW BETCHAN
Notary Public
State of Oklahoma
Commission #110110522
Expires: Nov. 25, 2027

CERTIFICATE OF WAGONER COUNTY CLERK

I, Lori Hendricks, the County Clerk of Wagoner County, here now state the subdivision called _____, has been filed into Wagoner County Records.

Lori Hendricks, Wagoner County Clerk



Certified True Copy
LORI HENDRICKS, COUNTY CLERK
Wagoner County, Okla.
By:
Heather Perry, DEPUTY

Reserve at The Pines III
BROKEN ARROW PROJECT #PR-000788-2024
Sheet 2 of 2