

PRELIMINARY PLAT

# The Preserve

OWNER/DEVELOPER

NEW BEDFORD LAKES,LLC  
1420 WEST KENOSHA  
BROKEN ARROW, OK 74012  
PHONE: 918-258-6161  
ATTN: GLENN SHAW

ENGINEER/SURVEYOR

AAB ENGINEERING LLC  
CERTIFICATE OF AUTHORIZATION NO. 6318, EXP. JUNE, 30, 2018  
PO BOX 2136  
SAND SPRINGS, OK 74063  
PHONE: 918.514.4283  
FAX: 918.514.4288  
EMAIL: ALAN @ AABENG.COM


A SUBDIVISION OF THE PART OF THE NORTHEAST QUARTER (SE/4) OF SECTION  
THIRTY-ONE (31), TOWNSHIP NINETEEN (19) NORTH, RANGE FIFTEEN (15) EAST.  
CITY OF BROKEN ARROW, WAGONER COUNTY, STATE OF OKLAHOMA

R-15-E

EAST 51ST STREET SOUTH

EAST OMAHA STREET SOUTH

PROJECT LOCATION

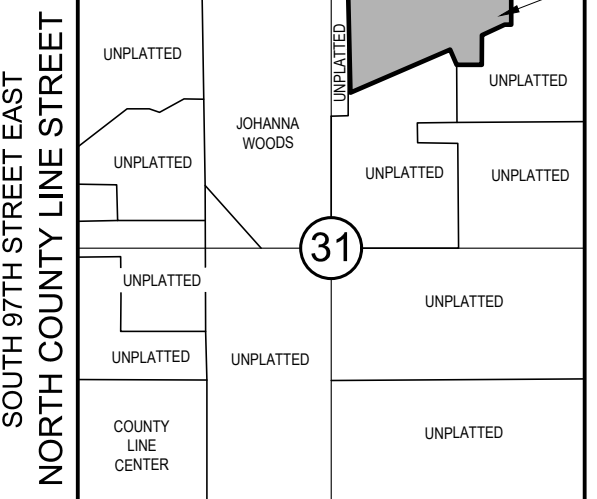

EAST ALBANY STREET

EAST 61ST STREET SOUTH

LOCATION MAP

SCALE: 1"=2000'



0 30 60 120  
DRAWING SCALE: 1"=60'

POC  
NW CORNER OF THE NE/4  
SEC. 31 T-19-N R-15-E

EAST OMAHA STREET SOUTH  
(EAST 51ST STREET SOUTH)

N88°48'45"E  
1727.88'

NORTH LINE OF NE/4



CURVE TABLE

CURVE #	LENGTH	RADIUS	DELTA
C1	39.27'	25.00'	90°00'00"
C2	21.03'	25.00'	48°11'23"
C3	241.19'	50.00'	276°22'46"
C4	21.03'	25.00'	48°11'23"
C5	36.45'	25.00'	83°32'48"
C6	40.30'	25.00'	92°21'21"
C7	16.09'	225.00'	04°05'51"
C8	13.29'	25.00'	30°27'58"
C9	131.71'	50.00'	150°55'56"
C10	13.29'	25.00'	30°27'58"
C11	21.03'	25.00'	48°11'23"
C12	241.19'	50.00'	276°22'46"
C13	21.03'	25.00'	48°11'23"
C14	39.27'	25.00'	90°00'00"
C15	34.84'	275.00'	07°15'35"
C16	32.21'	25.00'	73°49'06"
C17	92.05'	225.00'	23°26'27"
C18	89.20'	275.00'	18°35'04"
C19	68.73'	225.00'	17°30'07"
C20	1.57'	275.00'	00°19'36"
C21	35.24'	25.00'	80°46'12"
C22	66.64'	275.00'	13°53'04"
C23	39.27'	25.00'	90°00'00"
C24	13.29'	25.00'	30°27'58"
C25	131.71'	50.00'	150°55'56"
C26	13.29'	25.00'	30°27'58"
C27	39.27'	25.00'	90°00'00"
C28	92.05'	225.00'	23°26'29"
C29	39.27'	25.00'	90°00'00"
C30	39.27'	25.00'	90°00'00"
C31	112.51'	275.00'	23°26'29"
C32	21.03'	25.00'	48°11'23"
C33	241.19'	50.00'	276°22'46"
C34	21.03'	25.00'	48°11'23"
C35	92.05'	225.00'	23°26'29"
C36	39.27'	25.00'	90°00'00"
C37	39.27'	25.00'	90°00'00"
C38	39.27'	25.00'	90°00'00"
C39	13.29'	25.00'	30°27'58"
C40	131.71'	50.00'	150°55'56"
C41	13.29'	25.00'	30°27'58"
C42	112.51'	275.00'	23°26'29"
C43	39.27'	25.00'	90°00'00"
C44	55.24'	225.00'	14°04'00"
C45	34.85'	25.00'	79°51'32"
C46	18.84'	275.00'	03°55'32"
C47	66.71'	225.00'	16°59'17"
C48	25.34'	225.00'	06°27'12"

SUBDIVISION STATISTICS

SUBDIVISION CONTAINS NINETY SIX (96) LOTS  
IN SIX (6) BLOCKS

BLOCK 1 AREA: 0.85 ACRES - 3 LOTS  
BLOCK 2 AREA: 6.13 ACRES - 26 LOTS  
BLOCK 3 AREA: 1.52 ACRES - 6 LOTS  
BLOCK 4 AREA: 2.24 ACRES - 11 LOTS  
BLOCK 5 AREA: 4.54 ACRES - 22 LOTS  
BLOCK 6 AREA: 5.69 ACRES - 28 LOTS

LEGEND

B/L.....BUILDING LINE  
LNA.....LIMITS OF NO ACCESS  
POB.....POINT OF BEGINNING  
POC.....POINT OF COMMENCEMENT  
ROW.....RIGHT OF WAY  
U/E.....UTILITY EASEMENT  
F/E.....FENCE EASEMENT  
BK.....BOOK  
PG.....PAGE  
R.A.....RESTRICTED ACCESS  
[1234].....ADDRESS

FLOODPLAIN

PROPERTY IS NOT LOCATED WITHIN A FEDERALLY  
DEFINED SPECIAL FLOOD HAZARD AREA PER FIRM  
PANEL "40145C0105" DATED SEPTEMBER 30, 2016.

WATER AND SEWER

POTABLE WATER SUPPLY WILL BE SERVED BY  
WAGONER COUNTY RURAL WATER DISTRICT #4.  
SANITARY SEWER SERVICE WILL BE SUPPLIED  
BY THE CITY OF BROKEN ARROW, OKLAHOMA.

SITE DATA

**BENCHMARK**  
5/8" REBAR-1 1/2" ALUMINUM CAP-FLUSH-SET IN  
CONCRETE-STAMPED "90", SET N.E. OF THE INTERSECTION OF  
193RD E AVE. AND 51ST ST.  
ELEV = 686.25' (NAVD '88)

**BASIS OF BEARINGS**  
ASSUMED BEARING OF S 88°48'45" W BEING THE NORTH LINE  
OF THE NORTHEAST QUARTER OF SECTION 31 T-19N R-15-E.

**LAND AREA**  
1,146,006 SF ± / 26.31 ACRES ±

**MONUMENTATION**  
A 3/8" X 18" REBAR WITH A YELLOW PLASTIC CAP STAMPED  
"6318" TO BE SET AT ALL LOT CORNERS, ALL STREET  
CENTERLINE INTERSECTIONS, POINTS OF CURVE, POINTS OF  
TANGENT, POINTS OF COMPOUND CURVE, POINTS OF  
REVERSE CURVE, CENTER OF CUL-DE-SACS AND CENTER OF  
EYEBROWS, AFTER COMPLETION OF IMPROVEMENTS,  
UNLESS NOTED OTHERWISE.

**ADDRESSES**  
ADDRESSES SHOWN ON THIS PLAT WERE ACCURATE AT THE  
TIME THIS PLAT WAS FILED. ADDRESSES ARE SUBJECT TO  
CHANGE AND SHOULD NEVER BE RELIED ON IN PLACE OF  
LEGAL DESCRIPTION.

CONTACTS

**MUNICIPAL AUTHORITY**  
CITY OF BROKEN ARROW  
210 SOUTH 1ST STREET  
BROKEN ARROW, OK 74012

**UTILITY CONTACTS**

OKLAHOMA NATURAL  
GAS COMPANY  
5848 EAST 15TH STREET  
BROKEN ARROW, OK 74112  
PHONE: 918.831.8293

AEP / PSO  
212 EAST 6TH STREET  
BROKEN ARROW, OK 74119  
PHONE: 918.599.2351

WINDSTREAM TELECOM COMPANY  
2300 EAST 1ST PLACE  
BROKEN ARROW, OK 74012  
PHONE: 918.451.3427

COX COMMUNICATIONS  
1811 EAST 51ST STREET  
BROKEN ARROW, OK 74145  
PHONE: 918.286.4658

WAGONER COUNTY RURAL WATER DISTRICT #4  
9816 S. 239TH EAST AVENUE  
BROKEN ARROW, OKLAHOMA 74014  
918-258-2331

APPROVED BY THE CITY COUNCIL OF THE  
CITY OF BROKEN ARROW, OKLAHOMA.

MAYOR

ATTEST: CITY CLERK

PRELIMINARY PLAT

The Preserve

A SUBDIVISION OF THE PART OF THE NORTHEAST QUARTER (NE/4) OF SECTION THIRTY-ONE (31), TOWNSHIP NINETEEN (19) NORTH, RANGE FIFTEEN (15) EAST. CITY OF BROKEN ARROW, WAGONER COUNTY, STATE OF OKLAHOMA

OWNER/DEVELOPER

NEW BEDFORD LAKES,LLC  
1420 WEST KENOSHA  
BROKEN ARROW, OK 74012  
PHONE: 918-258-6161  
ATTN: GLENN SHAW

ENGINEER/SURVEYOR

AAB ENGINEERING LLC  
CERTIFICATE OF AUTHORIZATION NO. 6318, EXP. JUNE, 30, 2018  
PO BOX 2136  
SAND SPRINGS, OK 74063  
PHONE: 918.514.4283  
FAX: 918.514.4288  
EMAIL: ALAN @ AABENG.COM

KNOW ALL MEN BY THESE PRESENTS:  
NEW BEDFORD LAKES, LLC, AN OKLAHOMA LIMITED LIABILITY COMPANY, HEREINAFTER REFERRED TO AS THE "OWNER/DEVELOPER", IS THE OWNER OF THE FOLLOWING DESCRIBED LAND IN THE CITY OF BROKEN ARROW, WAGONER COUNTY, STATE OF OKLAHOMA, TO-WIT:

A TRACT OF LAND BEING PART OF THE NORTHEAST QUARTER (NE/4) OF SECTION 31, TOWNSHIP NINETEEN (19) NORTH, RANGE FIFTEEN (15) EAST OF THE INDIAN BASE AND MERIDIAN, WAGONER COUNTY, STATE OF OKLAHOMA ACCORDING TO THE U.S. GOVERNMENT SURVEY THEREOF, BEING MORE PARTICULARLY DESCRIBED AS FOLLOWS: COMMENCING AT THE NORTHWEST CORNER OF SAID NORTHEAST QUARTER (NE/4) OF SECTION 31, THENCE NORTH 88°48'45" EAST ALONG THE NORTH LINE OF SAID NORTHEAST QUARTER (NE/4) OF SECTION 31, A DISTANCE OF 177.00 FEET; THENCE SOUTH 01°37'06" EAST A DISTANCE OF 50.00 FEET TO THE POINT OF BEGINNING; THENCE NORTH 88°48'45" EAST AND PARALLEL TO THE NORTH LINE OF SAID NORTHEAST QUARTER (NE/4) OF SECTION 31 A DISTANCE OF 1727.51 FEET; THENCE SOUTH 01°11'15" EAST A DISTANCE OF 265.00 FEET; THENCE SOUTH 88°48'45" WEST A DISTANCE OF 69.62 FEET; THENCE SOUTH 63°51'01" WEST A DISTANCE OF 265.15 FEET; THENCE SOUTH 01°11'15" EAST A DISTANCE OF 313.73 FEET; THENCE SOUTH 88°48'45" WEST A DISTANCE OF 267.60 FEET; THENCE NORTH 24°37'44" WEST A DISTANCE OF 173.97 FEET; THENCE SOUTH 65°22'20" WEST A DISTANCE OF 1169.74 FEET; THENCE NORTH 01°37'06" WEST A DISTANCE OF 996.37 FEET TO THE POINT OF BEGINNING.

SAID TRACT CONTAINS 1,146,006 SQUARE FEET OR 26.31 ACRES, MORE OR LESS.

AND HAS CAUSED THE ABOVE DESCRIBED TRACT OF LAND TO BE SURVEYED, STAKED, PLATTED AND SUBDIVIDED INTO 96 LOTS IN 6 BLOCKS EACH ONE REFERRED TO HEREIN AS A "LOT" OR COLLECTIVELY AS "LOTS", IN CONFORMITY WITH THE ACCOMPANYING PLAT, AND HAS DESIGNATED THE SUBDIVISION AS "THE PRESERVE", A SUBDIVISION IN THE CITY OF BROKEN ARROW, WAGONER COUNTY, OKLAHOMA (HEREINAFTER REFERRED TO AS "THE PRESERVE" OR THE "SUBDIVISION").

SECTION I. PUBLIC STREETS, EASEMENTS AND UTILITIES

- A. PUBLIC STREETS AND GENERAL UTILITY EASEMENTS
- THE OWNER/DEVELOPER DOES HEREBY DEDICATE FOR PUBLIC USE THE STREETS DEPICTED ON THE ACCOMPANYING PLAT AND DOES FURTHER DEDICATE FOR PUBLIC USE THE UTILITY EASEMENTS AS DEPICTED ON THE ACCOMPANYING PLAT AS "U/E" OR "UTILITY EASEMENT", FOR OWNER/DEVELOPER AND ALL UTILITY SERVICES WITH FRANCHISE RIGHTS WITHIN THE CITY OF BROKEN ARROW FOR THE SEVERAL PURPOSES OF CONSTRUCTING, MAINTAINING, OPERATING, REPAIRING, REPLACING, AND/OR REMOVING ANY AND ALL PUBLIC UTILITIES, INCLUDING STORM SEWERS, SANITARY SEWERS, TELEPHONE AND COMMUNICATION LINES, ELECTRIC POWER LINES AND TRANSFORMERS, GAS LINES, WATER LINES AND CABLE TELEVISION LINES, TOGETHER WITH ALL FITTINGS, INCLUDING THE POLES, WIRES, CONDUITS, PIPES, VALVES, METERS AND EQUIPMENT FOR EACH OF SUCH FACILITIES AND ANY OTHER APPURTENANCES THERETO, WITH THE RIGHTS OF INGRESS AND EGRESS TO AND UPON THE UTILITY EASEMENTS FOR THE USES AND PURPOSES AFORESAID, PROVIDED HOWEVER, THE OWNER/DEVELOPER HEREBY RESERVES THE RIGHT TO CONSTRUCT, MAINTAIN, OPERATE, LAY AND RE-LAY ALL UTILITY LINES, INCLUDING WATER LINES AND SEWER LINES, TOGETHER WITH THE RIGHT OF INGRESS AND EGRESS FOR SUCH CONSTRUCTION, MAINTENANCE, OPERATION, LAYING AND RE-LAYING OVER, ACROSS AND ALONG ALL OF THE UTILITY EASEMENTS DEPICTED ON THE PLAT, FOR THE PURPOSE OF FURNISHING WATER SERVICE, SEWER SERVICE AND ALL UTILITY SERVICES TO THE AREA INCLUDED IN THE PLAT AND ELSEWHERE, AS MAY BE REQUIRED. THE OWNER/DEVELOPER HEREBY IMPOSES A RESTRICTIVE COVENANT, WHICH COVENANT SHALL BE BINDING ON EACH LOT OWNER AND SHALL BE ENFORCEABLE BY THE CITY OF BROKEN ARROW, OKLAHOMA, AND BY THE SUPPLIER OF ANY AFFECTED UTILITY SERVICE, THAT WITHIN THE UTILITY EASEMENTS DEPICTED ON THE ACCOMPANYING PLAT NO BUILDING, STRUCTURE OR OTHER ABOVE OR BELOW GROUND OBSTRUCTION SHALL BE PLACED, ERECTED, INSTALLED OR MAINTAINED, PROVIDED HOWEVER, NOTHING HEREIN SHALL BE DEEMED TO PROHIBIT DRIVES, PARKING AREAS, CURBING, LANDSCAPING, CUSTOMARY SCREENING FENCES AND WALLS THAT DO NOT CONSTITUTE AN OBSTRUCTION.
- B. UTILITY LINES AND SERVICE
1. OVERHEAD LINES FOR THE SUPPLY OF ELECTRIC, TELEPHONE AND CABLE TELEVISION SERVICES AND OTHER COMMUNICATION SERVICES MAY BE LOCATED ALONG THE PERIMETER EASEMENTS OF THE SUBDIVISION. STREET LIGHT POLES OR STANDARDS MAY BE SERVED BY OVERHEAD LINE OR UNDERGROUND CABLE THROUGHOUT THE SUBDIVISION. OTHERWISE, ALL SUPPLY LINES SHALL BE LOCATED UNDERGROUND IN THE GENERAL UTILITY EASEMENTS AND IN THE RIGHTS-OF-WAY FOR PUBLIC STREETS AS DEPICTED BY THE PLAT. SERVICE PEDESTALS AND TRANSFORMERS, AS SOURCES OF SUPPLY AT SECONDARY VOLTAGES, MAY ALSO BE LOCATED IN THE GENERAL UTILITY EASEMENTS.
2. UNDERGROUND SERVICE CABLES TO ALL STRUCTURES WHICH MAY BE LOCATED WITHIN THE SUBDIVISION MAY BE RUN FROM THE NEAREST SERVICE PEDESTAL OR TRANSFORMER TO THE POINT OF USAGE DETERMINED BY THE LOCATION AND CONSTRUCTION OF SUCH STRUCTURE AS MAY BE LOCATED UPON THE LOT, PROVIDED THAT UPON THE INSTALLATION OF A SERVICE CABLE TO A PARTICULAR STRUCTURE, THE SUPPLIER OF SERVICE SHALL THEREAFTER BE DEEMED TO HAVE A DEFINITIVE, PERMANENT AND EFFECTIVE EASEMENT ON THE LOT, COVERING A 5 FOOT STRIP EXTENDING 2.5 FEET ON EACH SIDE OF THE SERVICE CABLE, EXTENDING FROM THE SERVICE PEDESTAL OR TRANSFORMER TO THE SERVICE ENTRANCE ON THE STRUCTURE.
3. THE SUPPLIER OF ELECTRIC, TELEPHONE AND CABLE TELEVISION SERVICES AND OTHER COMMUNICATION SERVICES, THROUGH ITS AGENTS AND EMPLOYEES, SHALL AT ALL TIMES HAVE RIGHT OF ACCESS TO ALL GENERAL UTILITY EASEMENTS DEPICTED ON THE ACCOMPANYING PLAT OR OTHERWISE PROVIDED FOR IN THIS DEED OF DEDICATION FOR THE PURPOSE OF INSTALLING, MAINTAINING, REMOVING OR REPLACING ANY PORTION OF THE UNDERGROUND ELECTRIC, TELEPHONE, CABLE TELEVISION OR COMMUNICATION FACILITIES INSTALLED BY THE SUPPLIER OF THE UTILITY SERVICE.
4. THE OWNER OF THE LOT SHALL BE RESPONSIBLE FOR THE PROTECTION OF THE UNDERGROUND SERVICE FACILITIES LOCATED ON HIS LOT AND SHALL PREVENT THE ALTERATION OF GRADE OR ANY CONSTRUCTION ACTIVITY THAT WOULD INTERFERE WITH THE ELECTRIC, TELEPHONE, CABLE TELEVISION OR COMMUNICATION FACILITIES. THE SUPPLIER OF SERVICE SHALL BE RESPONSIBLE FOR ORDINARY MAINTENANCE OF UNDERGROUND FACILITIES, BUT THE OWNER SHALL PAY FOR DAMAGE OR RELOCATION OF SUCH FACILITIES CAUSED OR NECESSITATED BY ACTS OF THE OWNER OR HIS AGENTS OR CONTRACTORS.
5. THE FOREGOING COVENANTS SET FORTH IN THIS PARAGRAPH B SHALL BE ENFORCEABLE BY THE SUPPLIER OF THE ELECTRIC, TELEPHONE, CABLE TELEVISION OR OTHER COMMUNICATION SERVICE AND THE OWNER OF THE LOT AGREES TO BE BOUND HEREBY.
- C. WATER, SANITARY SEWER AND STORM SEWER SERVICE
1. THE OWNER OF THE LOT SHALL BE RESPONSIBLE FOR THE PROTECTION OF THE PUBLIC WATER MAINS, SANITARY SEWER MAINS AND STORM SEWERS LOCATED ON THEIR LOT AND SHALL PREVENT THE ALTERATION OF GRADE OR ANY CONSTRUCTION ACTIVITY WHICH MAY INTERFERE WITH SAID PUBLIC WATER MAIN, PUBLIC SANITARY SEWER MAIN OR STORM SEWER.
2. WITHIN THE UTILITY AND DRAINAGE EASEMENT AREAS DEPICTED ON THE ACCOMPANYING PLAT, THE ALTERATION OF GRADE FROM THE CONTOURS EXISTING UPON THE COMPLETION OF THE INSTALLATION OF A PUBLIC WATER MAIN, SANITARY SEWER MAIN, STORM SEWER OR DRAINAGE WAYS, OR ANY CONSTRUCTION ACTIVITY WHICH WOULD INTERFERE WITH PUBLIC WATER MAINS, SANITARY SEWER MAINS AND STORM SEWERS SHALL BE PROHIBITED. THE CITY OF BROKEN ARROW, INTER ALIA, MAY

- SPECIFICALLY ENFORCE THIS PROVISION.
3. WAGONER COUNTY RURAL WATER DISTRICT #4, OR ITS SUCCESSORS AS THE PROVIDER, SHALL BE RESPONSIBLE FOR ORDINARY MAINTENANCE OF PUBLIC WATER MAINS, BUT THE OWNER SHALL PAY FOR DAMAGE OR RELOCATION OF SUCH FACILITIES CAUSED OR NECESSITATED BY ACTS OF THE OWNER, HIS AGENTS OR CONTRACTORS.
4. THE CITY OF BROKEN ARROW, OKLAHOMA, OR ITS SUCCESSORS, SHALL AT ALL TIMES HAVE RIGHT OF ACCESS TO ALL EASEMENTS DEPICTED ON THE ACCOMPANYING PLAT, OR OTHERWISE PROVIDED FOR IN THIS DEED OF DEDICATION, FOR THE PURPOSE OF INSTALLING, MAINTAINING, REMOVING OR REPLACING ANY PORTION OF UNDERGROUND WATER OR SEWER FACILITIES OR STORM WATER FACILITIES. WAGONER COUNTY RURAL WATER DISTRICT #4 SHALL HAVE SUCH RIGHT OF ACCESS FOR THE PURPOSE OF INSTALLING, MAINTAINING, REMOVING OR REPLACING ANY PORTION OF POTABLE WATER FACILITIES, ITS SUCCESSOR UTILITY OR MUNICIPALITY PROVIDING WATER SERVICE SHALL HAVE SIMILAR RIGHT OF ACCESS.
5. WHERE WATER LINES ARE INSTALLED WITHIN A UTILITY EASEMENT, THAT PORTION OF THE UTILITY EASEMENT IS FOR THE USE OF WAGONER COUNTY RURAL WATER DISTRICT #4, OKLAHOMA, OR ITS SUCCESSORS. THE UTILITY EASEMENTS DEDICATED HEREIN FOR THE PURPOSE OF PROVIDING POTABLE WATER ARE DEDICATED TO WAGONER COUNTY RURAL WATER DISTRICT #4, OR ITS SUCCESSORS OR ASSIGNS, AS THE EXCLUSIVE PROVIDER OF POTABLE WATER TO THE SUBDIVISION. SEWER, GAS, ELECTRIC, COMMUNICATION, CABLE, SOLID WASTE MANAGEMENT, AND OTHER PROVIDERS OF UTILITIES, OTHER THAN POTABLE WATER, MAY ALSO USE SAID EASEMENTS.
6. THE FOREGOING COVENANTS SET FORTH IN THIS PARAGRAPH C SHALL BE ENFORCEABLE BY THE CITY OF BROKEN ARROW, OKLAHOMA, WAGONER COUNTY RURAL WATER DISTRICT #4, THEIR SUCCESSORS, OR ANY UTILITY PROVIDER OF SERVICES AND THE OWNER OF THE LOT AGREES TO BE BOUND HEREBY.
- D. PAVING AND LANDSCAPING WITHIN EASEMENTS
- THE OWNER OF THE LOT AFFECTED SHALL BE RESPONSIBLE FOR THE REPAIR OF DAMAGE TO LANDSCAPING AND PAVING OCCASIONED BY NECESSARY INSTALLATION OR MAINTENANCE OF UNDERGROUND WATER, SEWER, STORM SEWER, NATURAL GAS, COMMUNICATION, CABLE TELEVISION OR ELECTRIC FACILITIES WITHIN THE EASEMENT AREAS DEPICTED UPON THE ACCOMPANYING PLAT, PROVIDED, HOWEVER, THE CITY OF BROKEN ARROW, OKLAHOMA, OR THE SUPPLIER OF THE UTILITY SERVICE SHALL USE REASONABLE CARE IN THE PERFORMANCE OF SUCH ACTIVITIES.
- E. GAS SERVICE
1. THE OWNER OF THE LOT SHALL BE RESPONSIBLE FOR THE PROTECTION OF THE UNDERGROUND GAS FACILITIES LOCATED ON THE LOT.
2. WITHIN THE DEPICTED UTILITY EASEMENT AREAS, THE ALTERATION OF GRADE OR ANY CONSTRUCTION ACTIVITY, WHICH MAY INTERFERE WITH THE UNDERGROUND GAS FACILITIES, SHALL BE PROHIBITED.
3. THE SUPPLIER OF GAS SERVICE OR ITS SUCCESSORS SHALL BE RESPONSIBLE FOR ORDINARY MAINTENANCE OF THE GAS FACILITIES, BUT THE OWNER SHALL PAY FOR DAMAGE OR RELOCATION OF SUCH FACILITIES CAUSED OR NECESSITATED BY ACTS OF THE OWNER, HIS AGENTS OR CONTRACTORS.
4. THE SUPPLIER OF GAS SERVICE OR ITS SUCCESSORS SHALL AT ALL TIMES HAVE RIGHT OF ACCESS WITH THEIR EQUIPMENT TO ALL EASEMENT WAYS DEPICTED ON THE PLAT OR OTHERWISE PROVIDED FOR IN THIS DEED OF DEDICATION FOR THE PURPOSE OF INSTALLING, MAINTAINING, REMOVING OR REPLACING ANY PORTION OF UNDERGROUND GAS FACILITIES.
5. UNDERGROUND GAS SERVICE LINES TO ALL STRUCTURES WHICH MAY BE LOCATED WITHIN THE SUBDIVISION MAY BE RUN FROM THE NEAREST GAS MAIN TO THE POINT OF USAGE DETERMINED BY THE LOCATION AND CONSTRUCTION OF SUCH STRUCTURE AS MAY BE LOCATED UPON THE LOT, PROVIDED THAT UPON THE INSTALLATION OF A SERVICE LINE TO A PARTICULAR STRUCTURE, THE SUPPLIER OF SERVICE SHALL THEREAFTER BE DEEMED TO HAVE A DEFINITIVE, PERMANENT AND EFFECTIVE EASEMENT ON THE LOT, COVERING A 5 FOOT STRIP EXTENDING 2.5 FEET ON EACH SIDE OF THE SERVICE LINE, EXTENDING FROM THE GAS MAIN TO THE SERVICE ENTRANCE ON THE STRUCTURE.
6. THE FOREGOING COVENANTS SET FORTH IN THIS SUBSECTION E SHALL BE ENFORCEABLE BY THE SUPPLIER OF GAS SERVICE OR ITS SUCCESSORS AND THE OWNER OF THE LOT AGREES TO BE BOUND HEREBY.
- F. SURFACE DRAINAGE AND LOT GRADING RESTRICTION
- EACH LOT SHALL RECEIVE AND DRAIN, IN AN UNOBSTRUCTED MANNER, THE STORM AND SURFACE WATERS FROM LOTS AND DRAINAGE AREAS OF HIGHER ELEVATION AND FROM PUBLIC STREETS AND EASEMENTS. NO LOT OWNER SHALL CONSTRUCT OR PERMIT TO BE CONSTRUCTED ANY FENCING OR OTHER OBSTRUCTIONS WHICH WOULD IMPAIR THE DRAINAGE OF STORM AND SURFACE WATERS OVER AND ACROSS HIS LOT. THE FOREGOING COVENANTS SET FORTH IN THIS PARAGRAPH F SHALL BE ENFORCEABLE BY ANY AFFECTED LOT OWNER, BY THE OWNER/DEVELOPER AND BY THE CITY OF BROKEN ARROW, OKLAHOMA.
- G. LIMITS OF NO ACCESS
- THE UNDERSIGNED OWNER/DEVELOPER HEREBY RELINQUISHES RIGHTS OF VEHICULAR INGRESS OR EGRESS FROM ANY PORTION OF THE PROPERTY ADJACENT TO EAST OMAHA STREET WITHIN THE BOUNDS DESIGNATED AS "LIMITS OF NO ACCESS" (L.N.A.) ON THE ACCOMPANYING PLAT, WHICH "LIMITS OF NO ACCESS" MAY BE AMENDED OR RELEASED BY THE CITY OF BROKEN ARROW AREA PLANNING COMMISSION, OR ITS SUCCESSOR, WITH THE APPROVAL OF THE CITY OF BROKEN ARROW, OKLAHOMA, OR AS OTHERWISE PROVIDED BY THE STATUTES AND LAWS OF THE STATE OF OKLAHOMA PERTAINING THERETO, AND THE LIMITS OF NO ACCESS ABOVE ESTABLISHED SHALL BE ENFORCEABLE BY THE CITY OF BROKEN ARROW.
- H. SIDEWALKS
- SIDEWALKS ARE REQUIRED ALONG STREETS DESIGNATED BY AND IN ACCORDANCE WITH SUBDIVISION REGULATIONS. THE OWNER SHALL CONSTRUCT REQUIRED SIDEWALKS WITHIN ANY RESERVE AREAS, COMMON AREAS AND ALONG ARTERIAL STREET FRONTAGES OF ABUTTING LOTS HAVING ACCESS ONTO MINOR STREETS, WHERE SIDEWALKS ARE NOT CONSTRUCTED BY THE OWNER/DEVELOPER, THE BUILDER OF A RESIDENCE ON EACH LOT SHALL CONSTRUCT THE REQUIRED SIDEWALK. REQUIRED SIDEWALKS SHALL BE CONSTRUCTED IN CONFORMANCE WITH CITY OF BROKEN ARROW ENGINEERING DESIGN STANDARDS.
- I. MINIMUM BUILDING SETBACKS AND YARDS
1. NO BUILDING SHALL BE LOCATED NEARER TO THE RIGHT OF WAY OF AN ADJOINING PUBLIC STREET THAN THE BUILDING LINE DEPICTED ON THE ACCOMPANYING PLAT.
2. EACH LOT SHALL MAINTAIN SIDE YARDS WHICH IN THE AGGREGATE ARE NOT LESS THAN TEN (10) FEET IN WIDTH AND NO SIDE YARD SHALL BE LESS THAN FIVE (5) FEET IN WIDTH. SIDE YARDS ABUTTING A STREET SHALL NOT BE LESS THAN FIFTEEN (15) FEET, UNLESS THE GARAGE ENTRY IS LOCATED ON SUCH SIDE, WHERE IT WILL BE NO LESS THAN TWENTY (20) FEET.
3. THE MINIMUM REAR YARD SHALL BE TWENTY (20) FEET. CUSTOMARY ACCESSORY STRUCTURES MAY BE LOCATED IN THE REQUIRED REAR YARD, BUT NO BUILDING SHALL BE ERECTED NEARER THAN FIVE (5) FEET TO ANY LOT LINE.
4. NO BUILDING, WHETHER PRINCIPAL OR ACCESSORY, SHALL ENCROACH UPON ANY UTILITY EASEMENT AS DEPICTED ON THE ACCOMPANYING PLAT.
- J. CERTIFICATE OF OCCUPANCY RESTRICTIONS
- NO CERTIFICATE OF OCCUPANCY SHALL BE ISSUED BY THE CITY OF BROKEN ARROW UNTIL COMPLETION OF THE ENTIRE DEVELOPMENT AND ITS FORMAL ACCEPTANCE BY THE CITY OF BROKEN ARROW. ANY AND ALL CONSTRUCTION PURSUANT TO ANY BUILDING PERMIT, BUT PRIOR TO THE CITY OF BROKEN ARROW'S FORMAL ACCEPTANCE OF THE ENTIRE DEVELOPMENT, SHALL BE AT THE OWNER/DEVELOPER'S, CONTRACTOR'S/BUILDER'S OR INVESTOR'S OWN RISK.

SECTION II. PRIVATE RESTRICTIONS

- A. ARCHITECTURAL COMMITTEE.
1. PLAN REVIEW. NO BUILDING, FENCE, WALL, OR EXTERIOR ANTENNA SHALL BE ERECTED, PLACED OR ALTERED (INCLUDING EXTERIOR PAINTING) ON ANY LOT UNTIL THE PLANS AND SPECIFICATIONS HAVE BEEN APPROVED IN WRITING BY THE OWNER/DEVELOPER OR ITS AUTHORIZED REPRESENTATIVES OR SUCCESSORS, WHICH ARE HEREINAFTER REFERRED TO AS THE "ARCHITECTURAL COMMITTEE". FOR EACH BUILDING, THE REQUIRED PLANS AND SPECIFICATIONS SHALL BE SUBMITTED IN DUPLICATE AND INCLUDE A SITE PLAN, FLOOR PLAN, EXTERIOR ELEVATIONS, DRAINAGE AND GRADING PLANS, EXTERIOR MATERIALS AND COLOR SCHEME. IN THE EVENT THE ARCHITECTURAL COMMITTEE FAILS TO APPROVE OR DISAPPROVE PLANS AND SPECIFICATIONS SUBMITTED TO IT AS HEREIN REQUIRED WITHIN THIRTY (30) DAYS AFTER SUBMISSION, THE PLANS SO SUBMITTED SHALL BE DEEMED APPROVED. THE DEVELOPMENT AND USE OF THE SUBJECT LOT SHALL THEREAFTER BE IN SUBSTANTIAL COMPLIANCE WITH THE APPROVED PLANS OR APPROVED AMENDMENTS THERETO. IN THE EVENT NO SUIT TO ENJOIN THE ERECTION OF THE BUILDING OR STRUCTURE OR THE MAKING OF AN ALTERATION HAS BEEN COMMENCED PRIOR TO THE 30TH DAY FOLLOWING COMPLETION THEREOF, APPROVAL OF THE ARCHITECTURAL COMMITTEE SHALL NOT BE REQUIRED AND THIS COVENANT SHALL BE DEEMED TO HAVE BEEN FULLY COMPLIED WITH.
2. COMMITTEE PURPOSE. THE ARCHITECTURAL COMMITTEE'S PURPOSE IS TO PROMOTE GOOD DESIGN AND COMPATIBILITY WITHIN THE SUBDIVISION AND IN ITS REVIEW OF PLANS OR DETERMINATION OF ANY WAIVER AS HEREINAFTER AUTHORIZED MAY TAKE INTO CONSIDERATION THE NATURE AND CHARACTER OF THE PROPOSED BUILDING OR STRUCTURE; THE MATERIALS OF WHICH IT IS TO BE BUILT; THE AVAILABILITY OF ALTERNATIVE MATERIALS, THE SITE UPON WHICH IT IS PROPOSED TO BE ERECTED AND THE HARMONY THEREOF WITH THE SURROUNDING AREA. THE ARCHITECTURAL COMMITTEE SHALL NOT BE LIABLE FOR ANY APPROVAL, DISAPPROVAL OR FAILURE TO APPROVE HEREUNDER, AND ITS APPROVAL OF BUILDING PLANS SHALL NOT CONSTITUTE A WARRANTY OR RESPONSIBILITY FOR BUILDING METHODS, MATERIALS, PROCEDURES, STRUCTURAL DESIGN, GRADING OR DRAINAGE OR CODE VIOLATIONS. THE APPROVAL OR FAILURE TO APPROVE BUILDING PLANS SHALL NOT BE DEEMED A WAIVER OF ANY RESTRICTION. NOTHING HEREIN CONTAINED SHALL BE DEEMED TO PREVENT ANY LOT OWNER IN THE SUBDIVISION FROM PROSECUTING ANY LEGAL ACTION RELATING TO IMPROVEMENTS WITHIN THE SUBDIVISION WHICH THEY WOULD OTHERWISE BE ENTITLED TO PROSECUTE.
3. TRANSFER OF DUTIES. THE POWERS AND DUTIES OF THE ARCHITECTURAL COMMITTEE SHALL, ON LATER OF JANUARY 1, 2019, OR THE TRANSFER OF THE OWNER/DEVELOPER OF ITS LAST LOT IN THE ADDITION BE DEEMED TRANSFERRED TO THE THE PRESERVE HOMEOWNERS' ASSOCIATION, INC., OWNER/DEVELOPER, OR UPON WRITTEN ASSIGNMENT TO SAID HOMEOWNERS' ASSOCIATION BY THE OWNER/DEVELOPER, WHICHEVER EVENT FIRST OCCURS, AND THEREAFTER THE FOREGOING POWERS AND DUTIES SHALL BE EXERCISED BY THE BOARD OF DIRECTORS OF THE HOMEOWNERS' ASSOCIATION.
- B. USE
- THE USE OF THE LOTS SHALL BE LIMITED TO DETACHED SINGLE-FAMILY RESIDENCES AND CUSTOMARY ACCESSORY USES. ONLY ONE RESIDENCE SHALL BE PERMITTED UPON A LOT.
- C. FLOOR AREA
1. A SINGLE STORY DWELLING SHALL HAVE AT LEAST 1,000 SQUARE FEET OF FINISHED HEATED LIVING AREA.
2. IF A DWELLING HAS TWO LEVELS OR STORIES IMMEDIATELY ABOVE AND BELOW EACH OTHER MEASURED VERTICALLY AND ALL SUCH LEVELS OR STORIES ARE ABOVE THE FINISHED EXTERIOR GRADE OF SUCH DWELLING, THEN SUCH DWELLING SHALL HAVE AT LEAST 1,000 SQUARE FEET OF FINISHED HEATED LIVING AREA ON THE FIRST STORY OR LEVEL AND SHALL HAVE A TOTAL OF THE VARIOUS LEVELS OR STORIES OF AT LEAST 1,400 SQUARE FEET OF FINISHED HEATED LIVING AREA.
3. THE COMPUTATION OF LIVING AREA SHALL NOT INCLUDE ANY BASEMENT, GARAGE, OR ATTIC AREA USED FOR STORAGE. ALL LIVING AREA MEASUREMENTS SHALL BE TAKEN HORIZONTALLY AT THE TOP PLATE LEVEL TO THE FACE OF THE OUTSIDE WALL. REQUIRED LIVING AREA MUST AVERAGE AT LEAST SEVEN (7) FEET SIX (6) INCHES IN HEIGHT, EXCEPT THAT IN THE COMPUTATION OF SECOND OR UPPER STORY LIVING AREAS, THE HEIGHT SHALL BE SEVEN (7) FEET SIX (6) INCHES FOR AT LEAST ONE HALF (1/2) OF THE REQUIRED LIVING AREAS, AND ANY AREA LESS THAN FIVE (5) FEET IN HEIGHT SHALL BE EXCLUDED.
4. THE ARCHITECTURAL COMMITTEE MAY WAIVE, IN THE PARTICULAR INSTANCE, UPON WRITTEN REQUEST, THE FLOOR AREA REQUIREMENTS SET OUT IN PARAGRAPH 1 AND 2 OF THIS SUBSECTION C.
- D. MAXIMUM BUILDING HEIGHT
- NO BUILDING SHALL EXCEED TWO AND ONE HALF STORIES OR THIRTY-FIVE FEET IN HEIGHT.
- E. GARAGES
- WITHIN EACH LOT THERE SHALL BE PROVIDED A MINIMUM OF TWO PARKING SPACES WITHIN AN ATTACHED GARAGE. GARAGES SHALL BE ENCLOSED, AND CARPORTS ARE PROHIBITED. GLASS IN GARAGE DOORS IS PROHIBITED.
- F. FOUNDATIONS
- ANY EXPOSED FOUNDATION SHALL BE BRICK, STONE OR STUCCO. NO STEM WALL SHALL BE EXPOSED.
- G. MASONRY
- THERE SHALL NOT BE ANY SPECIFIC MASONRY REQUIREMENT OTHER THAN PARAGRAPH F ABOVE.
- H. WINDOWS
- WITHIN A DWELLING, ALUMINUM WINDOWS HAVING A MILL FINISH ARE PROHIBITED.
- I. ROOF PITCH
- NO DWELLING SHALL HAVE A ROOF PITCH OF LESS THAN 6/12, EXCEPT FOR PORCHES AND PATIOS THAT IN NO EVENT SHALL HAVE A ROOF PITCH OF LESS THAN 4/12.
- J. ROOFING MATERIALS
- ROOFING FOR A DWELLING SHALL BE SELF-SEALING COMPOSITION SHINGLES, TAMKO HERITAGE 30 YEAR WEATHERED WOOD IN COLOR, PROVIDED, HOWEVER, THAT IF SUCH ROOFING SHOULD NOT BE REASONABLY AVAILABLE, ALTERNATIVE ROOFING APPROVED BY THE ARCHITECTURAL COMMITTEE SHALL BE PERMITTED UPON DETERMINATION OF THE ARCHITECTURAL COMMITTEE THAT THE ALTERNATIVE IS OF EQUAL OR SUPERIOR QUALITY AND OF A DESIGN AND COLOR COMPATIBLE WITH THE ROOFING MATERIAL ABOVE SPECIFIED.

PRELIMINARY PLAT

OWNER/DEVELOPER

NEW BEDFORD LAKES,LLC  
1420 WEST KENOSHA  
BROKEN ARROW, OK 74012  
PHONE: 918-258-8161  
ATTN: GLENN SHAW

The Preserve

A SUBDIVISION OF THE PART OF THE NORTHEAST QUARTER (NE/4) OF SECTION THIRTY-ONE (31), TOWNSHIP NINETEEN (19) NORTH, RANGE FIFTEEN (15) EAST. CITY OF BROKEN ARROW, WAGONER COUNTY, STATE OF OKLAHOMA

ENGINEER/SURVEYOR

AAB ENGINEERING LLC  
CERTIFICATE OF AUTHORIZATION NO. 6318, EXP. JUNE, 30, 2018  
PO BOX 2136  
SAND SPRINGS, OK 74063  
PHONE: 918.514.4283  
FAX: 918.514.4288  
EMAIL: ALAN @ AABENG.COM

K. DRIVEWAYS

DRIVEWAYS SHALL BE CONCRETE, SHALL BE THE SAME COLOR AS THE SIDEWALKS AND CURBS WITHIN THE SUBDIVISION, AND SHALL REQUIRE APPROVAL OF THE ARCHITECTURAL COMMITTEE.

L. FENCING

1. ALL FENCING SHALL BE IN ACCORDANCE WITH THE CITY OF BROKEN ARROW ZONING CODE. INTERIOR FENCING OR WALLS SHALL NOT EXTEND BEYOND THE BUILDING LINES OF THE LOT AND, IF A DWELLING IS BUILT BEHIND THE FRONT BUILDING LINE OF A LOT, NO FENCE MAY EXTEND BEYOND THE POINT NEAREST THE STREET AT EACH END CORNER OF THE DWELLING, PROVIDED, HOWEVER, ON CORNER LOTS, FENCING MAY EXTEND TO THE SIDE YARD LOT LINE. EXCEPT AS SPECIFIED IN SECTION L(2) IMMEDIATELY BELOW, (I) ALL FENCING SHALL BE 6' PRIVACY CONSTRUCTED OF STANDARD WOOD; AND (II) CHAIN LINK, BARBED WIRE, MESH AND OTHER METAL FENCING IS PROHIBITED. NO FENCE SHALL EXCEED 6 FEET IN HEIGHT. FENCES FACING THE STREET AND INSTALLED IN SIDE YARDS BETWEEN DWELLINGS SHALL BE ALIGNED WITH EXISTING FENCES ON ADJOINING LOTS WHERE POSSIBLE. THE GOOD SIDE OF EVERY FENCE SHALL FACE THE STREET AND WOOD FENCES SHALL BE STAINED WITH CLEAR STAIN UNLESS OTHERWISE APPROVED BY THE ARCHITECTURAL COMMITTEE. OTHER TYPES OF FENCING CONSTRUCTED OF WROUGHT IRON, BRICK, OR STONE MAY BE PERMITTED IF PREAPPROVED BY THE ARCHITECTURAL COMMITTEE. VINYL COATED CHAIN LINK FENCE, WITH WOODED POST AND TOP RAIL IS RESTRICTED TO LOTS ADJACENT TO RESERVE AREAS ONLY IN ACCORDANCE WITH SECTION II(L)(2) IMMEDIATELY BELOW.
2. WITH RESPECT TO LOTS WHICH ARE CONTIGUOUS WITH LAKES, PONDS OR DETENTION FACILITIES IN RESERVE AREAS, THE SIDE YARD FENCES SHALL BE TAPERED IN HEIGHT TO FIVE FEET (5') WITHIN THIRTY FEET (30') OF THE PERIMETER FENCING THE LAKE, POND OR DETENTION AREA AND WITHIN SAID 30' AREA SHALL BE OF THE SAME SPECIFICATIONS AS THE PERIMETER FENCING DESCRIBED BELOW. PERIMETER FENCING SHALL BE REQUIRED ALONG AND PARALLEL TO THE COMMON BOUNDARY OF ALL LOTS WITH THE RESERVE AREAS WITH LAKES, PONDS OR DETENTION AREAS AND SAID PERIMETER FENCING SHALL BE CONSTRUCTED OF VINYL COATED CHAIN LINK RESIDENTIAL GRADE MATERIAL WITH WOODEN TOP RAILS AND POSTS. SUCH PERIMETER FENCING SHALL BE FOUR FEET (4') IN HEIGHT AND UNIFORM IN HEIGHT, DESIGN AND MATERIAL.

M. SEASONAL DECORATIONS

ALL SEASONAL DECORATIONS SHALL BE REMOVED NO LATER THAN THIRTY (30) CALENDAR DAYS FROM THE DAY OF THE ACTUAL HOLIDAY.

N. ON-SITE CONSTRUCTION

NO RESIDENCE OR BUILDING BUILT OFF-SITE SHALL BE MOVED TO, OR PLACED ON, ANY LOT.

O. OUTBUILDINGS

WITHIN EACH LOT, OUTBUILDINGS ARE PROHIBITED.

P. SWIMMING POOLS

ABOVE GROUND SWIMMING POOLS ARE PROHIBITED.

Q. ANTENNAS

EXTERIOR TELEVISION, "CB" RADIO OR OTHER TYPE ANTENNAS INCLUDING SATELLITE DISHES SHALL BE PROHIBITED, EXCEPT SATELLITE DISHES NOT EXCEEDING 20" IN DIAMETER MAY BE AFFIXED TO A REAR BUILDING WALL OR DORMER IF BELOW THE EAVE, OR GROUND MOUNTED WITHIN A REAR YARD IF NOT EXCEEDING 6' IN HEIGHT, AND IN EACH INSTANCE THE SATELLITE DISH SHALL NOT BE VISIBLE FROM THE STREET VIEW OF THE DWELLING.

R. LOT MAINTENANCE

NO INOPERATIVE VEHICLE OR MACHINERY SHALL BE STORED ON ANY LOT AND EACH LOT SHALL BE MAINTAINED IN A NEAT AND ORDERLY CONDITION FREE OF RUBBISH, TRASH AND OTHER DEBRIS AND SHALL BE CUT, TRIMMED OR MOVED TO PREVENT GROWTH OF WEEDS OR TALL GRASS.

S. RECREATIONAL VEHICLES

BOATS, TRAILERS, CAMPERS AND OTHER RECREATIONAL VEHICULAR EQUIPMENT SHALL NOT BE STORED ON ANY LOT EXCEPT WITHIN AN ENCLOSED GARAGE.

T. NON-RECREATIONAL TRAILERS, MACHINERY AND EQUIPMENT

NO NON-RECREATIONAL TRAILERS, MACHINERY OR EQUIPMENT SHALL BE STORED, PLACED OR PARKED ON ANY LOT, EXCEPT WITHIN AN ENCLOSED GARAGE, OR ON ANY STREET WITHIN THE SUBDIVISION; PROVIDED HOWEVER, NOTHING HEREIN SHALL PROHIBIT THE PARKING OF VEHICLES, MACHINERY AND EQUIPMENT WHEN BEING UTILIZED IN CONNECTION WITH SERVICES PERTAINING TO A RESIDENCE.

U. CLOTHESLINES AND GARBAGE RECEPTACLES

EXPOSED CLOTHESLINE POLES OR OTHER OUTSIDE DRYING APPARATUS ARE PROHIBITED, AND NO EXPOSED GARBAGE CAN, TRASH CAN OR ANY TRASH BURNING APPARATUS OR STRUCTURE SHALL BE PLACED ON ANY LOT OR ANY RESERVE AREA.

V. ANIMALS

NO ANIMALS, LIVESTOCK OR POULTRY OF ANY KIND MAY BE MAINTAINED, BRED, SOLD OR KEPT EXCEPT THAT TWO DOGS, TWO CATS AND OTHER HOUSEHOLD PETS MAY BE KEPT PROVIDED THAT THEY ARE NOT USED FOR COMMERCIAL PURPOSES.

W. NOXIOUS ACTIVITY

NO NOXIOUS OR OFFENSIVE TRADE OR ACTIVITY SHALL BE CARRIED OUT UPON ANY LOT OR UPON ANY RESERVE AREA, NOR SHALL ANYTHING BE DONE THEREON THAT MAY BE OR MAY BECOME AN ANNOYANCE OR NUISANCE TO THE NEIGHBORHOOD.

X. SIGNAGE

NO SIGN OF ANY KIND SHALL BE DISPLAYED TO THE PUBLIC VIEW ON ANY LOT EXCEPT ONE SIGN OF NOT MORE THAN FIVE (5) SQUARE FEET ADVERTISING THE PROPERTY FOR SALE OR RENT. SIGNS USED BY THE OWNER/DEVELOPER OR A BUILDER TO ADVERTISE ANY PROPERTY WITHIN THE ADDITION DURING THE CONSTRUCTION AND LOT SALES PERIOD MAY BE UP TO TWELVE (12) SQUARE FEET. OWNER/DEVELOPER MAY MAINTAIN SIGNAGE AND PROMOTIONAL DISPLAYS FOR AS LONG AS IT OWNS A LOT IN THE ADDITION.

Y. MATERIALS AND STORAGE

NO LOT SHALL BE USED FOR THE STORAGE OF MATERIALS FOR A PERIOD OF GREATER THAN THIRTY (30) DAYS PRIOR TO THE START OF CONSTRUCTION AND THE CONSTRUCTION SHALL BE COMPLETED WITHIN SIX (6) MONTHS THEREAFTER. EACH LOT SHALL BE MAINTAINED IN A NEAT AND ORDERLY CONDITION.

Z. GARAGE SALES/YARD SALES

GARAGE SALES/YARD SALES WILL BE ALLOWED ONCE EACH CALENDAR YEAR. THE DATE WILL BE SET BY THE BOARD OF DIRECTORS OF THE THE PRESERVE HOMEOWNER'S ASSOCIATION.

AA. TEMPORARY TRASH RECEPTACLES

A TEMPORARY TRASH RECEPTACLE IS REQUIRED ON EACH LOT DURING THE CONSTRUCTION OF ANY DWELLING IN THE SUBDIVISION. THE TEMPORARY TRASH RECEPTACLE SHALL BE MAINTAINED BY THE LOT OWNER AND SHALL BE EMPTIED ON A REGULAR BASIS OR AS NEEDED.

BB. BASKETBALL GOALS

NO BASKETBALL GOAL OR STRUCTURES ARE ALLOWED IN ANY OF THE STREET RIGHTS OF WAY.

SECTION III. HOMEOWNERS' ASSOCIATION

A. FORMATION OF HOMEOWNERS' ASSOCIATION

THE OWNER/DEVELOPER HAS FORMED AN ASSOCIATION OF THE OWNERS OF THE LOTS WITHIN THE PRESERVE (HEREINAFTER AND HERETOFORE REFERRED TO AS THE "HOMEOWNERS' ASSOCIATION") TO BE ESTABLISHED IN ACCORDANCE WITH THE STATUTES OF THE STATE OF OKLAHOMA, FOR THE GENERAL PURPOSES OF MAINTAINING THE COMMON AREAS, INCLUDING BUT WITHOUT LIMITATION THE RESERVE AREAS AND PERIMETER FENCING, AND ENHANCING THE VALUE, DESIRABILITY AND ATTRACTIVENESS OF ALL PHASES OF THE PRESERVE.

B. MEMBERSHIP

EVERY PERSON OR ENTITY WHO IS A RECORD OWNER OF THE FEE INTEREST OF A LOT SHALL BE A MEMBER OF THE HOMEOWNERS' ASSOCIATION. MEMBERSHIP SHALL BE APPURTENANT TO AND MAY NOT BE SEPARATED FROM THE OWNERSHIP OF A LOT.

C. ASSESSMENT

EACH RECORD OWNER OF A LOT SHALL BE SUBJECT TO ASSESSMENT BY THE HOMEOWNERS' ASSOCIATION FOR THE PURPOSES OF IMPROVEMENT AND MAINTENANCE OF THE STORM WATER DETENTION FACILITIES, RESERVE AREAS AND OTHER COMMON AREAS.

SECTION IV. ENFORCEMENT, DURATION, AMENDMENT AND SEVERABILITY

A. ENFORCEMENT

THE RESTRICTIONS HEREIN SET FORTH ARE COVENANTS TO RUN WITH THE LAND AND SHALL BE BINDING UPON THE OWNER/DEVELOPER, ITS SUCCESSORS AND ASSIGNS. WITHIN THE PROVISIONS OF SECTION I, PUBLIC STREETS, EASEMENTS AND UTILITIES ARE SET FORTH CERTAIN COVENANTS AND THE ENFORCEMENT RIGHTS PERTAINING THERETO, AND ADDITIONALLY THE COVENANTS WITHIN SECTION I, WHETHER OR NOT SPECIFICALLY THEREIN SO STATED SHALL INURE TO THE BENEFIT OF AND SHALL BE ENFORCEABLE BY THE CITY OF BROKEN ARROW, OKLAHOMA. THE COVENANTS CONTAINED IN SECTION II, PRIVATE RESTRICTIONS, AND SECTION III, HOMEOWNERS' ASSOCIATION, SHALL INURE TO THE BENEFIT OF ANY OWNER OF A LOT AND THE HOMEOWNERS' ASSOCIATION. IF THE OWNER OF ANY LOT SHALL VIOLATE ANY OF THE COVENANTS WITHIN SECTION III, IT SHALL BE LAWFUL FOR ANY OWNER OF A LOT OR THE HOMEOWNERS' ASSOCIATION TO MAINTAIN ANY ACTION AT LAW OR IN EQUITY AGAINST THE PERSON OR PERSONS VIOLATING OR ATTEMPTING TO VIOLATE ANY SUCH COVENANT, TO PREVENT HIM OR THEM FROM SO DOING OR TO COMPEL COMPLIANCE WITH THE COVENANT. IN ANY JUDICIAL ACTION BROUGHT TO ENFORCE THE COVENANTS ESTABLISHED WITHIN THIS DEED OF DEDICATION, THE DEFENSE THAT THE PARTY INITIATING THE EQUITABLE PROCEEDING HAS AN ADEQUATE REMEDY AT LAW IS HEREBY WAIVED. IN ANY JUDICIAL ACTION BROUGHT BY ANY OWNER OF A LOT OR THE ASSOCIATION, WHICH ACTION SEEKS TO ENFORCE THE COVENANTS CONTAINED IN THE RESTRICTIVE COVENANTS HEREIN AND/OR TO RECOVER DAMAGES FOR THE BREACH THEREOF, THE PREVAILING PARTY SHALL BE ENTITLED TO RECEIVE REASONABLE ATTORNEY FEES AND COSTS AND EXPENSES INCURRED IN SUCH ACTION.

B. DURATION

THE RESTRICTIVE COVENANTS HEREIN, TO THE EXTENT PERMITTED BY APPLICABLE LAW, SHALL BE PERPETUAL BUT IN ANY EVENT SHALL BE IN FORCE AND EFFECT FOR A TERM OF NOT LESS THAN THIRTY (30) YEARS FROM THE DATE OF THE RECORDING OF THIS DEED OF DEDICATION UNLESS TERMINATED OR AMENDED AS HEREINAFTER PROVIDED.

C. AMENDMENT

THE COVENANTS CONTAINED WITHIN SECTION I, PUBLIC STREETS, EASEMENTS AND UTILITIES, MAY BE AMENDED OR TERMINATED AT ANY TIME BY A WRITTEN INSTRUMENT SIGNED AND ACKNOWLEDGED BY THE OWNER OF THE LAND TO WHICH THE AMENDMENT OR TERMINATION IS TO BE APPLICABLE AND APPROVED BY THE CITY OF BROKEN ARROW PLANNING COMMISSION, OR ITS SUCCESSORS AND THE CITY OF BROKEN ARROW, OKLAHOMA. THE COVENANTS AND RESTRICTIONS CONTAINED WITHIN SECTION II, PRIVATE RESTRICTIONS, MAY BE AMENDED OR TERMINATED AT ANY TIME BY A WRITTEN INSTRUMENT SIGNED AND ACKNOWLEDGED BY THE OWNER/DEVELOPER DURING SUCH PERIOD THAT THE OWNER/DEVELOPER IS THE OWNER OF AT LEAST 1 LOT, OR ALTERNATIVELY THE COVENANTS AND RESTRICTIONS MAY BE AMENDED OR TERMINATED AT ANY TIME BY A WRITTEN INSTRUMENT SIGNED AND ACKNOWLEDGED BY THE OWNERS OF 60% OF THE LOTS WITHIN THE SUBDIVISION. IN THE EVENT OF ANY CONFLICT BETWEEN AN AMENDMENT OR TERMINATION PROPERLY EXECUTED BY THE OWNER/DEVELOPER (DURING ITS OWNERSHIP OF AT LEAST 1 LOT) AND ANY AMENDMENT OR TERMINATION PROPERLY EXECUTED BY THE OWNERS OF AT LEAST 60% OF THE LOTS, THE INSTRUMENT EXECUTED BY THE OWNER/DEVELOPER SHALL PREVAIL DURING ITS OWNERSHIP OF AT LEAST 1 LOT. THE PROVISIONS CONTAINED WITHIN SECTION III, HOMEOWNERS' ASSOCIATION, MAY BE AMENDED OR TERMINATED AT ANY TIME BY A WRITTEN INSTRUMENT SIGNED AND ACKNOWLEDGED BY THE OWNER/DEVELOPER DURING SUCH PERIOD THAT THE OWNER/DEVELOPER IS THE OWNER OF AT LEAST 1 LOT, OR ALTERNATIVELY THE COVENANTS AND RESTRICTIONS MAY BE AMENDED OR TERMINATED AT ANY TIME BY A MAJORITY VOTE OF THE MEMBERS OF THE HOMEOWNER' ASSOCIATION AS EVIDENCED BY WRITTEN INSTRUMENT SIGNED AND ACKNOWLEDGED BY THE PRESIDENT OF THE HOMEOWNERS' ASSOCIATION. IN THE EVENT OF ANY CONFLICT BETWEEN AN AMENDMENT OR TERMINATION PROPERLY EXECUTED BY THE OWNER/DEVELOPER (DURING ITS OWNERSHIP OF AT LEAST 1 LOT) AND ANY AMENDMENT OR TERMINATION EVIDENCED BY AN INSTRUMENT PROPERLY EXECUTED BY THE PRESIDENT OF THE HOMEOWNERS' ASSOCIATION, THE INSTRUMENT EXECUTED BY THE OWNER/DEVELOPER SHALL PREVAIL DURING ITS OWNERSHIP OF AT LEAST 1 LOT. THE PROVISIONS OF ANY INSTRUMENT AMENDING OR TERMINATING COVENANTS AS ABOVE SET FORTH SHALL BE EFFECTIVE FROM AND AFTER THE DATE, IT IS PROPERLY RECORDED.

D. SEVERABILITY

INVALIDATION OF ANY RESTRICTION SET FORTH HEREIN, OR ANY PART THEREOF, BY AN ORDER, JUDGMENT, OR DECREE OF ANY COURT, OR OTHERWISE, SHALL NOT INVALIDATE OR AFFECT ANY OF THE OTHER RESTRICTIONS OR ANY PART THEREOF AS SET FORTH HEREIN, WHICH SHALL REMAIN IN FULL FORCE AND EFFECT.

IN WITNESS WHEREOF: NEW BEDFORD LAKES, LLC, AN OKLAHOMA LIMITED LIABILITY COMPANY, HAS EXECUTED THIS INSTRUMENT THIS \_\_\_\_TH DAY OF \_\_\_\_\_, 2017.

NEW BEDFORD LAKES, LLC,  
AN OKLAHOMA LIMITED LIABILITY COMPANY

BY: \_\_\_\_\_  
GLENN SHAW, MANAGER

STATE OF OKLAHOMA )  
) SS  
COUNTY OF WAGONER)

THIS INSTRUMENT WAS ACKNOWLEDGED BEFORE ME ON THIS \_\_\_\_TH DAY OF \_\_\_\_\_, 2017, BY GLENN SHAW, MANAGER OF NEW BEDFORD LAKES, LLC.

\_\_\_\_\_  
NOTARY PUBLIC  
MY COMMISSION EXPIRES: \_\_\_\_\_  
COMMISSION NUMBER: \_\_\_\_\_

CERTIFICATE OF SURVEY

I, ERIC ROLLSTON, A LICENSED PROFESSIONAL LAND SURVEYOR IN THE STATE OF OKLAHOMA, HEREBY CERTIFY THAT I HAVE SURVEYED, SUBDIVIDED AND PLATTED THE ABOVE TRACT DESIGNATED AS "THE PRESERVE" AN ADDITION TO THE CITY OF BROKEN ARROW, WAGONER COUNTY, STATE OF OKLAHOMA. THE ABOVE PLAT IS AN ACCURATE REPRESENTATION OF SAID SURVEY.

\_\_\_\_\_  
ERIC ROLLSTON  
LICENSED PROFESSIONAL LAND SURVEYOR  
OKLAHOMA NO. 1761

STATE OF OKLAHOMA )  
) SS  
COUNTY OF WAGONER)

BEFORE ME, A NOTARY PUBLIC IN AND FOR SAID STATE AND COUNTY, ON THIS \_\_\_\_TH DAY OF \_\_\_\_\_, 2017, PERSONALLY APPEARED ERIC ROLLSTON, TO ME KNOWN TO BE THE IDENTICAL PERSON WHO SUBSCRIBED HIS NAME TO THE FOREGOING INSTRUMENT, AND ACKNOWLEDGED TO ME THAT HE EXECUTED THE SAME AS HIS FREE AND VOLUNTARY ACT AND DEED, FOR THE USES AND PURPOSE THEREIN SET FORTH.

\_\_\_\_\_  
NOTARY PUBLIC  
MY COMMISSION EXPIRES: NOVEMBER 20, 2019  
COMMISSION NUMBER: 11010522

